

TO: 5  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-155-21256-00-00  
Spot: NWNENE Sec/Twnshp/Rge: 27-24S-8W  
4950 feet from S Section Line, 990 feet from E Section Line  
Lease/Unit Name: FOSTER Well Number: 1  
County: RENO Total Vertical Depth: 3940 feet

Operator License No.: 30080  
Op Name: HONEY OIL CO., INC.  
Address: 8526 BOXTHORN  
WICHITA, KS 67226

Conductor Pipe: Size \_\_\_\_\_ feet:  
Surface Casing: Size 8.625 feet: 214 160 SX CMT \$ 128.05  
Production: Size 5.5 feet: 3927 125 SX CMT  
Liner: Size \_\_\_\_\_ feet:

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 12/11/2001 11:00 AM  
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.  
Proposal Rcvd. from: JOE MACE Company: QUALITY WELL SERVICE Phone: (620) 727-3410

Proposed Plugging Method: Sand to 3700'-5sxs. 35sxs-1250. 35sxs-750. 265'-0'.

Plugging Proposal Received By: JACK LUTHI Witness Type: Plugging Operations 100% Witnessed (Complete)  
Date/Time Plugging Completed: 12/11/2001 4:00 PM KCC Agent: JACK LUTHI

Actual Plugging Report:

Sanded bottom to 3700' and 5sxs of common. Shot 5 1/2" casing off at 2826'. Pulled to 1250'. Pumped 35sxs, pulled to 750', pumped 35sxs, pulled to 265' circulated cement to surface.

RECEIVED  
KCC DISTRICT #2

DEC 11 2001

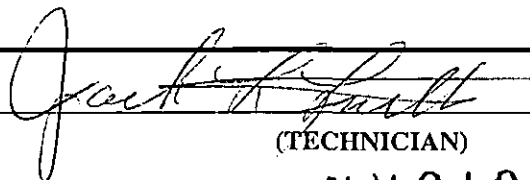
WICHITA, KS

Remarks: UNITED # 3463 60/40 4% GEL.

Plugged through: CSG

District: 02

Signed

  
(TECHNICIAN)

INVOICED

Form CP-2/3

DATE 12-28-01

TEL. NO. 2002061096