


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

15-155-20010-0000
Form CP-4

WELL PLUGGING RECORD

NORTH



Locate well correctly on above
Section Plat

Reno

County. Sec. 33 Twp. 24S Rge. 5 (E) W (W)

Location as "NE/CNW%SW%" or footage from lines C NE/4 NW/4

Lease Owner Beacon Resources Corp.

Lease Name Bontrager

Well No. 1

Office Address 412 Union Center Bldg., Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 7-15 19 67

Application for plugging filed 7-15 19 67

Application for plugging approved 7-15 19 67

Plugging commenced 7-15 19 67

Plugging completed 7-15 19 67

Reason for abandonment of well or producing formation dry hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Toman

Producing formation Depth to top Bottom Total Depth of Well Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION | CONTENT | FROM | TO | SIZE | PUT IN | PULLED OUT |
|--------------|---------|------|-----|-------|--------|------------|
| Surface Pipe | | -0- | 570 | 8 5/8 | 570 | -0- |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy mud

#1 Plug @ 575' W/20 sks cement

#2 Plug @ 200' W/ 20 sks cement

#3 Plug @ 40' W/10 sks cement

#4 Plug in rat hole W/2 sks cement

RECEIVED
STATE CORPORATION COMMISSION

JUL 20 1967

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor S & S Drilling Co.
Address Box 645, Great Bend, Kansas 67530

STATE OF Kansas, COUNTY OF Barton, ss.

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

Box 645, Great Bend, Kansas 67530

(Address)

Subscribed and sworn to before me this 17th day of July, 19 67

My commission expires

7/9/71

Notary Public.

WELL LOG
 Pontrager #1
 C NE/4 NW/4 33-24S-5W
 Reno County, Kansas

| FROM | TO | |
|------|------|------------------|
| 0 | 30 | Clay |
| 30 | 70 | Sand |
| 70 | 440 | Shale and shells |
| 440 | 670 | Salt |
| 670 | 1563 | Lime |
| 1563 | 2360 | Lime and shale |
| 2360 | 2500 | Shale |
| 2500 | 2760 | Shale and lime |
| 2760 | 2853 | Lime |
| 2853 | 3038 | Lime and shale |
| 3038 | 3113 | Lime |
| 3113 | 3403 | Lime and shale |
| 3403 | 3628 | Lime |
| 3628 | 3724 | Shale |
| 3724 | 3830 | Shale and lime |
| 3830 | 3855 | Lime |
| 3855 | | Total Depth |

Elevation: 1361' K.B.


STATE OF KANSAS

COUNTY OF RANTON ss

T. D. Sweetman, Partner of S & S Drilling Company, being first duly sworn on oath says: That I have knowledge of the facts, statements and matters herein contained and the log of the above described well as filed and that the same are true and correct.

T. D. Sweetman
 T. D. Sweetman

Subscribed and sworn before me this 17th day of July, 1967

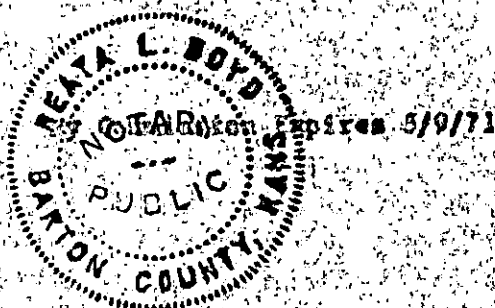

Reata L. Boyd
 Notary Public Ranton County

RECEIVED
 STATE CORPORATION COMMISSION

JUL 20 1967

CONSERVATION DIVISION
 Wichita, Kansas