

15.167.20479.00.00

9

STATE OF KANSAS
STATE CORPORATION COMMISSION


Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Russell Co., Kansas County. Sec. 14 Twp. 15S Rge. (E) 12 (W)
Location as "NE/CNW/SW" or footage from lines SW NE SE

Lease Owner Jayhawk Oil Co.
Lease Name Kaufman Well No. #1
Office Address 103 One Twenty Bldg., Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed June 4, 1971
Application for plugging filed June 4, 1971
Application for plugging approved June 4, 1971
Plugging commenced June 4, 1971
Plugging completed June 4, 1971
Reason for abandonment of well or producing formation Dry Hole

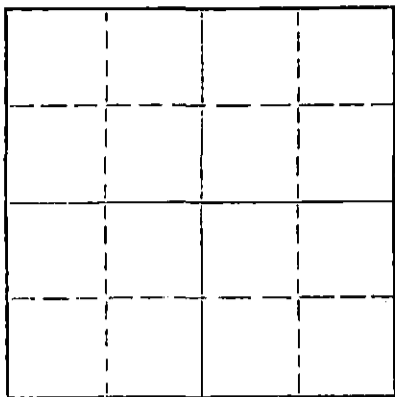

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Don Truan
Producing formation Depth to top Bottom Total Depth of Well 3275 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	251'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plug @ 480' w/40 sks cement, plug @ 240' w/25 sks cement, plug @ 40' solid bridge and 10 sks cement.

RECEIVED
STATE CORPORATION COMMISSION
JUN 15 1971
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Leben Drilling, Inc.
Address 100 Park Ave. Bldg., Suite 333, Oklahoma City, Oklahoma 73102

STATE OF OKLAHOMA, COUNTY OF OKLAHOMA, ss.
Leslie Kite (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Leslie Kite

(Address)

SUBSCRIBED AND SWORN TO before me this 11th day of June, 1971

My commission expires April 29, 1975

Notary Public

WELL LOG 15.167.20479.00.00

9

Company Jayhawk Oil Co.

Sec. 14 T. 15S R. 12W

Contractor Leben Drilling, Inc.

Loc. SW NE SE

Farm Kaufman #1

County Russell Co., Kansas


Total Depth 3275

Casing 8 5/8" @ 251'

Commenced May 28, 1971

Production 5 1/2"

Completed June 4, 1971



Figures Indicate Bottom of Formations

- 0 - 55' Surface Clay, Sd & Post Rock
- 55 - 251' Sh & Blue Sh
- 251 - 500' Red Bed & Sd
- 500 - 702' Red Bed
- 702 - 732' Anhy
- 732 - 1330' Sh
- 1330 - 1375' Lm & Sh
- 1375 - 1610' Sh & Lm
- 1610 - 2855' Lm & Sh
- 2855 - 3275' Lm

RECEIVED
 STATE CORPORATION COMMISSION
 JUN 15 1971
 CONSERVATION DIVISION
 Wichita, Kansas

State of OKLAHOMA

 County of OKLAHOMA

SS

I, Leslie of Leben Drilling, Inc., upon oath state that the above and foregoing is a true and correct copy of the log of the Kaufman #1 Well.

Leslie

Subscribed and sworn to before me this 11th day of June, 1971

My Commission Expires: April 29, 1975 Drew A. Thompson