


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
P. O. Box 17027  
Wichita, Kansas 67217  
NORTH

WELL PLUGGING RECORD

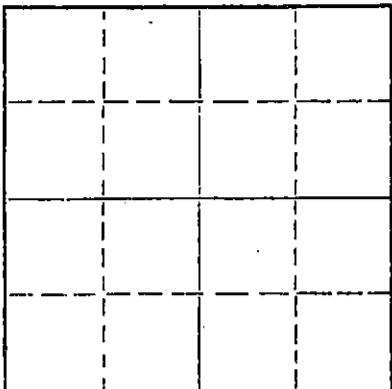

Locate well correctly on above  
Section Plat

Stafford County, Sec. 30 Twp. 24 Rge. 13W (E) (W)  
Location as "NE/CNWxSWx" or footage from lines SE SE NW  
Lease Owner Petroleum Management, Inc.  
Lease Name Aitken #1 Well No.  
Office Address Wichita, Kansas 67202  
Character of Well (completed as Oil, Gas or Dry Hole)  
Date well completed 19  
Application for plugging filed 19  
Application for plugging approved 19  
Plugging commenced 8/3/72 19  
Plugging completed 8/8/72 19  
Reason for abandonment of well or producing formation depleted.

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Biberstein  
Producing formation Depth to top Bottom Total Depth of Well 4174 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	312	none
				5 1/2"	4168	2293'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked hole to 4025', pushed plug to 3650' and ran 5 sacks of cement. Loaded hole, shot pipe at 2900', 2777', 2651', 2508', 2388', 2284', pulled 70 joints. Pumped 2 sacks hulls, 15 sacks gel and 100 sacks of cement.

8-16-72

PLUGGING COMPLETE.

RECEIVED  
STATE CORPORATION COMMISSION  
AUG 16 1972  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KNIGHT CASING PULLING CO., INC.  
Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss.


NOEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight  
CHASE, KANSAS

(Address)

SUBSCRIBED AND SWORN TO before me this 10th day of August, 19 72

My commission expires

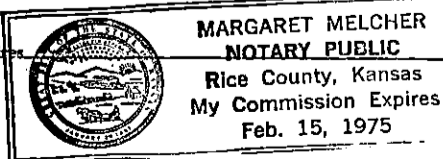

Margaret Melcher  
Notary Public.