


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

WELL PLUGGING RECORD

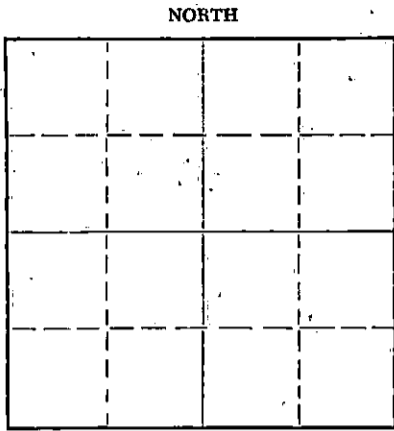

Locate well correctly on above Section Plat

Stafford County. Sec. 25 Twp. 24S Rge. 14 (E) X (W)
Location as "NE/CNW/SW" or footage from lines C W/2 SW SE
Lease Owner Dunne-Gardner Drilling Co., Inc.
Lease Name Tregellas Well No. 1
Office Address 300 Schweiter Building, Wichita 2, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) dry hole
Date well completed Jan. 1, 19 62
Application for plugging filed Jan. 1, 19 62
Application for plugging approved Jan. 1, 19 62
Plugging commenced Jan. 1, 19 62
Plugging completed Jan. 1, 19 62
Reason for abandonment of well or producing formation dry

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Lecamp
Producing formation Depth to top Bottom Total Depth of Well 3165 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	261	8-5/8"		

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Mud to 240'. Set plug w/1/4 of hulls, 20 sacks cement.
Mud to 235'. Set plug w/1/4 hulls, 10 sacks cement.

RECEIVED
STATE CORPORATION COMMISSION

JAN 4 1962

CONSERVATION DIVISION

1-4-62

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Dunne-Gardner Drilling Co., Inc.
Address 300 Schweiter Building, Wichita 2, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Don Gardner (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
300 Schweiter Bldg., Wichita 2, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 3rd day of January, 1962

My commission expires November 9, 1965

[Signature]
Marilyn E. Fox
Notary Public.

DRILLER'S LOG

OPERATOR: Dunne-Gardner Drilling Co., Inc.
300 Schweiter Building, Wichita 2, Kansas

LEASE: Tregellas

WELL: No. 1

LOCATION: C W/2 SW SE Section 25, Township 24 South, Range 14 West
Stafford County, Kansas

CONTRACTOR: Dunne-Gardner Drilling Co., Inc.

DATE COMMENCED: December 21, 1961

DATE COMPLETED: JANUARY 1, 1962

TOTAL DEPTH: 3165'

CASING: Set 8-5/8" surface casing at 261' w/225 sacks HA-5
with Posmix.

<u>FROM</u>	<u>TO</u>	
0	255	Sand & Surface Shale
255	833	Shale
833	851	Anhydrite
851	1390	Shale and Shells
1390	1790	Shale
1790	1960	Lime and Shale
1960	2295	Lime
2295	2970	Lime and Shale
2970	3165	Lime
3165		T. D.

RECEIVED
STATE REGULATION COMMISSION
FEB 21 1962
CONSERVATION DIVISION
Wichita, Kansas

I certify the above to be true and correct to the best of my knowledge and belief.


DUNNE-GARDNER DRILLING CO., INC.

By 

Don Gardner

Subscribed and sworn to before me this 12th day of January, 1962.

My Commission Expires:
November 9, 1965


Marilyn E. Fox, Notary Public