


WELL PLUGGING RECORD

NORTH

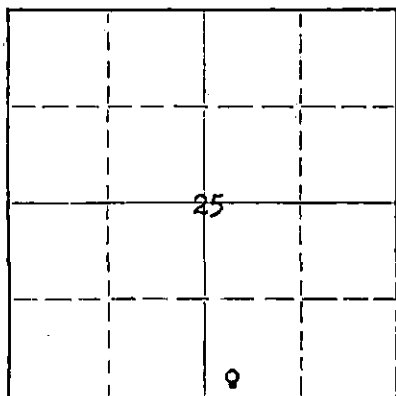

Locate well correctly on above
Section Plat

Stafford County, Sec. 25 Twp. 24S Rge. (E) 14 (W)
Location as "NE/CNW/SW" or footage from lines SW SW SE
Lease Owner Shell Oil Company
Lease Name G. P. Tregellas Well No. 2
Office Address Box 744, Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed May 4 19 53
Application for plugging filed December 19 19 57
Application for plugging approved December 20 19 57
Plugging commenced December 14 19 57
Plugging completed January 15 19 58
Reason for abandonment of well or producing formation Oil Depleted

If a producing well is abandoned, date of last production September 17 19 58
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well J. L. Brock
Producing formation Arbuckle Depth to top 4181 Bottom - Total Depth of Well 4192 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Arbuckle	IP 3000 BO & O water.	4182	4192	8 5/8" 5 1/2"	835' 4182'	None 2797'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Measured in to TD 4192. Plugged off bottom with sand to 4170' & dumped 5 sax cement to 4129. Shot casing at 3291; gas blew in; killed well with 218 bbls mud. Filled hole as follows - mud to 872, 50 sax cement to 783, mud to 473, 50 sax cement to 318, mud to 300, 15 sax cement to 254, rock to 244, mud to 15 & to base of cellar with 5 sax cement.

RECEIVED
STATE CORPORATION COMMISSION

JAN 31 1958

CONSERVATION DIVISION
Wichita, Kansas

1-31-58

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Forbes Casing Pulling Co.
Address Box 221, Great Bend, Kansas

STATE OF KANSAS, COUNTY OF BARTON, ss.
A. W. Weber (employee of owner) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature)

Box 744, Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 29th day of January, 19 58

My commission expires January 28, 1961

Notary Public.

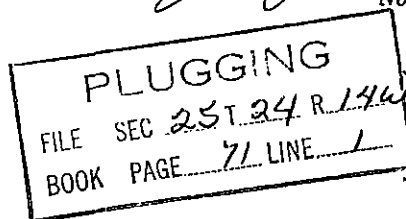

15-185-12991-0000

SHELL OIL COMPANY
G. P. Tregellas No. 2

SW SW SE 25-24S-14
Stafford County, Kansas

Total Depth 4192
Elevation 1942 DF

Casing - 8-5/8 @ 825', 425 sx cement.
5 1/2" @ 4182', 175 sx cement.

<u>Formation</u>	<u>Depth</u>
Surface soil-clay-sand	100
Shale	255
Shale-redbed	300
Red bed	420
Red bed-shale	530
Shale	625
Sand	675
Shale-shells	790
Red bed-shale	820
Red bed	828
Anhydrite	838
Red bed-shale	915
Shale-red bed	1035
Shale	1142 1/4
Salt	1143 1/4
Lime-shale	1504
Salt	1518
Shale-lime	1540
Salt-shale	1820
Shale	1875
Lime	1960
Lime-shale	2045
Lime	2175
Lime-shale	3350
Lime	3445
Shale-lime	3703
Lime	3870
Shale	3885
Lime	4035
Lime-chert	4089
Lime	4107
Lime-chert	4125
Lime	4140
Lime-shale	4170
Lime	4183
Dolomite	4192

RECEIVED
STATE CORPORATION COMMISSION
DEC 20 1957
CONSERVATION DIVISION
Wichita, Kansas

PLUGGING

FILE SEC 25T 24 R 19W
BOOK PAGE 71 LINE 1