


15-185-20719.0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

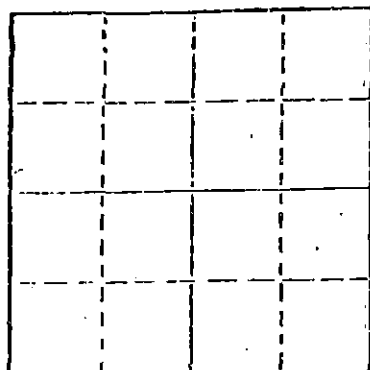

Locate well correctly on above
Section Plot

Stafford County. Sec. 25 Twp. 24S Rge. 14W E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
100' N of SE SE SW

Lease Owner W. L. Kirkman, Inc.
Lease Name Koelsch A-1 Well No.
Office Address P O Box 18611, Wichita, Ks. 67207
Character of Well (Completed as Oil, Gas or Dry Hole)

Date Well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 10/30/80 19
Plugging completed 10/30/80 19
Reason for abandonment of well or producing formation
Depleted

If a producing well is abandoned, date of last production 19.

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Duane Rankin
Producing formation Depth to top Bottom Total Depth of Well 4125'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	303	None
				5-1/2"	4183	1726'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Squeezed hole with 5 sacks hulls, 20 sacks gel and 1 sack hulls. Released
plug and displaced with 125 sacks 50/50 pos 4% gel and 3% cc.

Plugging complete.

11-6-80

RECEIVED
STATE CORPORATION COMMISSION

NOV - 6 1980

Conservation Division
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KELSO CASING PULLING
CHASE, KANSAS

STATE OF Kansas COUNTY OF Rice, ss.
R. Darrell Kelso (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.


(Signature)

Chase, Kansas

(Address)

SUBSCRIBED AND SWORN TO before me this 5th day of November, 1980

My commission expires



Notary Public.

COMPANY W. L. Kirkman

SEC. 25 T. 24S R. 14W
LOC. 100' N of SE SE SW

FARM Koelsch

NO. A-1

COUNTY Stafford

TOTAL DEPTH 4,186'


COMM. April 12, 1977

COMP. April 23, 1977

SHOT OR TREATED

CONTRACTOR H-30, Inc.

ISSUED April 27, 1977



CASING

20	10	
15	8-5/8"	303' cemented w/285 sxs cement ELEVATION 1949 K.B.
12	6	
13	5 1/2"	4,183' cemented w/450 sxs cement PRODUCTION

FIGURES INDICATE BOTTOM OF FORMATIONS

Sand & Shale	306'
Shale	837'
Anhydrite	847'
Shale	1,572'
Shale and Lime	1,835'
Lime and Shale	1,954'
Shale and Lime	2,175'
Lime and Shale	2,365'
Shale and Lime	2,545'
Lime and Shale	4,181'
Lime	4,186'
Rotary Total Depth	4,186'

I hereby certify the above and foregoing to be
a true and correct log of the above described
well as shown by the drilling reports.

H-30, INC.

Dean Britting
Dean Britting

State of Kansas }
County of Sedgwick } ss:

Subscribed and Sworn to before me a Notary Public in and
for said county and state this 27th. day of April, 1977.

My Commission Expires:

June 30, 1978

Elsie Willison
Elsie Willison - Notary Public

RECEIVED
STATE CORPORATION COMMISSION
OCT 14 1980
CONSERVATION DIVISION
Wichita, Kansas