

STATE OF KANSAS
STATE CORPORATION COMMISSION


Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Hodgeman County, Sec. 23 Twp. 22S Rge. 25W (E) (W)

Location as "NE/CNW/SW" or footage from lines C SW SE
Lease Owner Donald C. Slawson
Lease Name Kellogg 'A' Well No. 1
Office Address 408 One Twenty Building-Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed September 8, 1971
Application for plugging filed September 8, 1971
Application for plugging approved September 8, 1971
Plugging commenced September 8, 1971
Plugging completed September 8, 1971
Reason for abandonment of well or producing formation Dry Hole

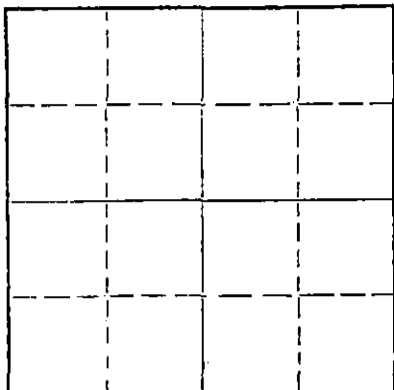

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well E. Eves-Box 'F'-Sublette, Kansas
Producing formation Depth to top Bottom Total Depth of Well 4740 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	556'	8 5/8"	X	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Mud to 600'; 50 sx cement
Mud to 40'; 10 sx cement
2 sx cement in rat hole

Job complete at 10:45 a.m. 9-8-71

RECEIVED
STATE CORPORATION COMMISSION
SEP 21 1971
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Slawson Drilling Company, Inc.
Address Suite 408 One Twenty Building - Wichita, Kansas 67202


STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
MAXINE V. STARR (employee of owner) or (owner or operator) of the above-described

well, being duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above described well as filed and that the same are true and correct. So help me God.

(Signature) Maxine V. Starr
408 One Twenty Building-Wichita, Kansas 67202
(Address)

Subscribed and sworn to before me this 20th day of September, 1971

My commission expires May 15, 1975
Linda R. Mitchell
Notary Public.



WELL LOG

Company: Donald C. Slawson
Suite 408 One Twenty Building
Wichita, Kansas 67202

Lease: Kellogg 'A' #1
C SW SE, Section 23-22S-25W
Hodgeman County, Kansas

Total Depth: 4740' Elevation: 2524 K.B.

Contractor: Slawson Drilling Company, Inc.

Commenced: August 30, 1971

Completed: September 8, 1971

Casing: 8 5/8" at 556' with 300 sx cement

0-76	Clay & Sand
76-1687	Shale & Shells
1687-1721	Anhydrite
1721-2200	Shale & Shells
2200-2500	Shale & Lime
2500-4073	Lime & Shale
4073-4740	Lime
4740	Total Depth

RECEIVED
STATE CORPORATION COMMISSION
SEP 21 1971
CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS)
) SS:
COUNTY OF SEDGWICK)

I, Maxine V. Starr, of the Slawson Drilling Company, Inc., upon oath state that the above and foregoing is a true and correct copy of the log of the Kellogg 'A' #1 well.

Maxine V. Starr
MAXINE V. STARR

Subscribed and sworn to before me this 20th day of September, 1971.

Linda R. Mitchell
Linda R. Mitchell, Notary Public

