

STATE OF KANSAS
STATE CORPORATION COMMISSION


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 West Broadway
Wichita, Kansas

Kingman County, Sec. 14 Twp. 30 Rge. 9 ~~XXXXXX~~ (W)

Location as "NE/CNW%SW%" or footage from lines: C SE NW
Lease Owner Prime Drilling Company & Walker Oil Corporation
Lease Name A. Goenner Well No. 1
Office Address 814 Union Center, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed August 10 19 60
Application for plugging filed August 10 19 60
Application for plugging approved August 10 19 60
Plugging commenced August 10 19 60
Plugging completed August 10 19 60
Reason for abandonment of well or producing formation no oil and/or gas found in commercial quantities
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

NORTH

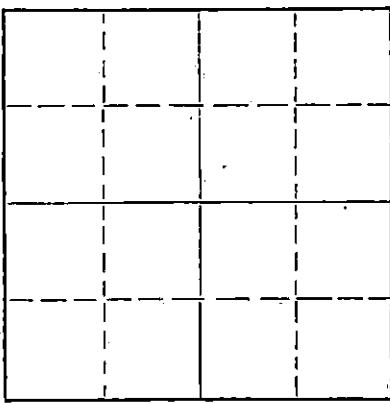

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Fred Hampel
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4315 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	278'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with extra heavy rotary mud from total depth to 240'. Set bottom plug at 240' with 1/4 sx. Hulls, 20 sacks cement through D. P., filled hole with extra heavy rotary mud from bottom plug to 35'. Set Plug at 35' with 1/4 sx. Hulls, 10 sacks cement to bottom of cellar.

RECEIVED
STATE CORPORATION COMMISSION
AUG 17 1960
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor Prime Drilling Company
Address 814 Union Center, Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
R. R. McNicol (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. R. McNicol
814 Union Center, Wichita, Kansas
(Address)

Subscribed and Sworn to before me this 15th day of August, 1960

Darlene May
Darlene May Notary Public.
My commission expires Sept. 30, 1963

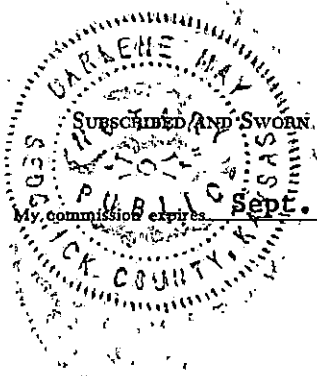

ROTARY DRILLING LOG

OPERATOR: Prime Drilling Company and
Walker Oil Corporation
A. GOENNER NO. 1
C SE NW Sec. 14-30-9W,
Kingman County, Kansas

CONTRACTOR: Prime Drilling Company
COMM: 7-30-60
COMP: 8-10-60

Remarks: Set 8-5/8" surface pipe
at 278' w/225 Cement.

FORMATIONS:

Clay	35'
Sand	65'
Red Bed	280'
Shale & Red Bed	850'
Shale & Shells	1460'
Shale & Lime Streaks	1475'
Anhydrite	1505'
Lime & Shale	2075'
Shale & Lime	3110'
Lime	3270'
Lime & Shale	3475'
Lime	4315'
Rotary Total Depth (D&A)	4315'

We certify the above log is true and correct
to the best of our knowledge and belief.

PRIME DRILLING COMPANY

R. R. McNicol

R. R. McNicol

RECEIVED
STATE CORPORATION COMMISSION

AUG 17 1960

CONSERVATION DIVISION
Wichita, Kansas