


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bitting Building  
Wichita, Kansas

15-009-15182-0002  
WELL PLUGGING RECORD

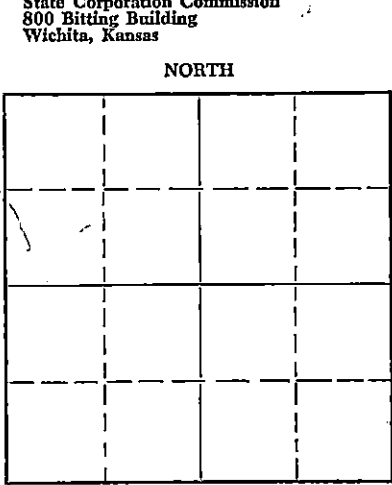

Barton County, Sec. 18 Twp. 16 Rge. 11 (E) (W)  
Location as "NE/CNW&SW" or footage from lines C S/2 SW NW  
Lease Owner National Cooperative Refinery Association  
Lease Name Krier Salt Water Disposal Well Well No. 1  
Office Address 305 Rule Building, Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Salt Water Disposal  
Date well completed January 7, 1945  
Application for plugging filed April 28, 1954  
Application for plugging approved April 29, 1954  
Plugging commenced June 13, 1954  
Plugging completed June 14, 1954  
Reason for abandonment of well or producing formation  
Well no longer capable of taking water properly.  
If a producing well is abandoned, date of last production April 15, 1954  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Warren Horner  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3451 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	490	None
				5 1/2"	3350	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Mixed 12 sacks of mud and dumped down 5 1/2" casing, followed up with 250 sacks of cement dumped by Globe Cementing Company. Run steel line, 190' to top of cement. Dumped 3 gallon sand to 187'. Dumped 20 sacks of cement on up to base of cellar.

RECEIVED  
STATE CORPORATION COMMISSION  
JUN 19 1954  
CONSERVATION DIVISION  
Wichita, Kansas  
06-19-54

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Globe Cementing Company  
Address Great Bend, Kansas

STATE OF Kansas COUNTY OF Sedgwick, ss.  
C. R. Sears (employee of owner) or ~~(owner or operator)~~ of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C.R. Sears  
305 Rule Building, Wichita, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 18th day of June, 1954  
Donna Rose Porter  
Notary Public.

My commission expires April 14, 1958

PLUGGING  
FILE SEC 18 T 16 R 11W  
BOOK 30 LINE 29

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY  
412 Union National Bk. Bldg., Wichita, Kansas

15-009-15182-0001

Company - BLACK-MARSHALL OIL CO.  
Farm - Krier No. SWD 1.

SEC. 18 T. 16 R. 11 W  
SE SW SW NW  
698' WL 357' SL SW NW

Total Depth. 720  
Comm. 12-5-44 Comp. 1-7-45  
Shot or Treated.  
Contractor. P.E. Morris  
Issued. 9-22-45

County. Barton  
KANSAS



CASING:  
10" 268' P  
8 5/8" 490' Cem.

Elevation. \_\_\_\_\_

Production. S. W. D. W.

Figures Indicate Bottom of Formations.

lime	15
shale blue	80
shale gy	130
sand	135
shale gy	155
red rock	190
shale blue	210
red rock	230
shale	240
red rock	250
shale red & blue	255
red rock	310
sand	360
shale blue	408
shale	415
shale blue	470
sand	475
shale gy	480
red rock	660
shale red	665
red rock	710
lime	720
Total Depth	

HFV 310-60  
HFV 635-50

2417  
2209  
6/23/6

**PLUGGING**  
FILE SEC 18 T 16 R 11 W  
BOOK PAGE 30 LINE 29

IVED  
ON COMMISSIONER

1954  
DIVISION  
Krier



100  
 90  
 80  
 70  
 60  
 50  
 40  
 30  
 20  
 10  
 0

100  
 90  
 80  
 70  
 60  
 50  
 40  
 30  
 20  
 10  
 0

100-010  
 010-010

SEP 29 1945