


STATE OF KANSAS  
 CONSERVATION COMMISSION  
 Give All Information Completely  
 Make Required Affidavit  
 Mail or Deliver Report to:  
 Conservation Division  
 State Corporation Commission  
 800 Bitting Building  
 Wichita, Kansas

WELL PLUGGING RECORD  
 OR 15-009-05589-0000  
 FORMATION PLUGGING RECORD

Strike out upper line  
 when reporting plug-  
 ging of formations.

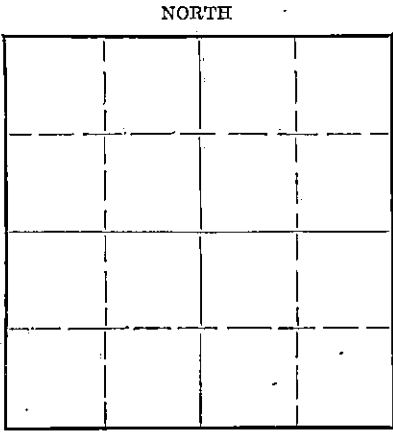

Locate well correctly on above  
 Section Plat

Barton County. Sec. 24 Twp. 16 Rge. (E) 11 (W)  
 Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines SW SW SW  
 Lease Owner Springer Interests  
 Lease Name Pichner Well No. 1  
 Office Address 308 Springer Building - Tulsa, Oklahoma  
 Character of Well (completed as Oil, Gas or Dry Hole) Dry  
 Date well completed 10/23 1948  
 Application for plugging filed 10/23/ 1948  
 Application for plugging approved 10/23 1948  
 Plugging commenced 10/23 1948  
 Plugging completed 10/23 1948  
 Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production 19  
 Was permission obtained from the Conservation Division or its agents before plugging was com-  
 menced? Yes

Name of Conservation Agent who supervised plugging of this well C. D. Stough  
 Producing formation Depth to top Bottom Total Depth of Well 3405 Feet  
 Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy mud to 125'  
 Set wooden plug at 125'  
 Mixed and pumped 15 sacks of cement thru drill pipe.  
 Filled hole with heavy mud to 30'  
 Set wooden plug at 30'.  
 Mixed and poured 10 sacks of cement on top of same.

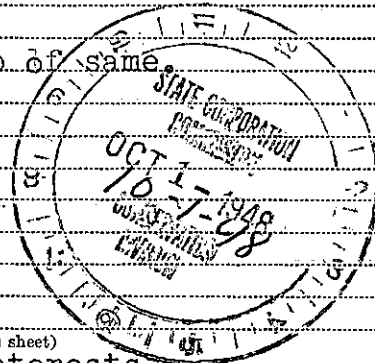

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Springer Interests  
 Address 308 Springer Building - Tulsa, Oklahoma

STATE OF Kansas, COUNTY OF Sedgwick, ss.  
 Wm. S. Brunson (employee of owner) or (owner or operator)

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. BRUNSON DRILLING CO., INC.

(Signature) William S. Brunson

302-304 Central Building, Wichita, Kans. (Address)

SUBSCRIBED AND SWORN to before me this 28 day of October, 1948

John C. Reticker Notary Public.

My commission expires September 10, 1951

PLUGGING  
 FILE SEC 24 T 16 R 11 W  
 BOOK PAGE 65 LINE 15

15009-05589-0000

SPRINGER INTERESTS  
308 Springer Building  
Tulsa, Oklahoma

Farm: Pichner #1

SW SW SW  
Sec. 24-16-11  
Barton County, Kansas

Commenced RD: 10/10/48  
Completed RD: 10/23/48  
Total Depth :

Elevation:  
Contractor: Brunson Drlg. Co., Inc.  
Tools : Rotary

Casing : 125' - 8 5/8" 28# OD 8 rd thd smls

STRATA	DEPTH	
Sand, shale & shells	125	
Shale & shells	190	<u>TOPS</u>
Sand	210	
Shale & shells	245	
Sand	275	
Shale & shells	320	
Red bed & shells	715	
Anhydrate	735	
Shale & shells	800	
Shells, red bed & shale	850	
Shale & shells	1170	
Salt & shale	1390	
Shale & shells	1600	
Shale & lime	1710	
Lime & shale	1720	
Sandy shale	1745	
Broken lime & shale	1835	
Lime	1975	
Lime & shale	2075	
Shale & lime	2660	
Lime	3349	
Conglomerate	3370	
Lime	3405	
Total Depth	3405	

I hereby certify that the above is a true and correct log of said well as reflected by the daily drilling reports.


BRUNSON DRILLING COMPANY, Inc.  
BY

*William S. Brunson*  
Wm. S. Brunson Sec.

Signed and sworn to in my presence this 28th day of October, 1948, by Wm. S. Brunson, secretary of the Brunson Drilling Company, Inc., a corporation in the State of Kansas.

*Jean E. Retter*  
Notary Public

My commission expires September 10, 1951.

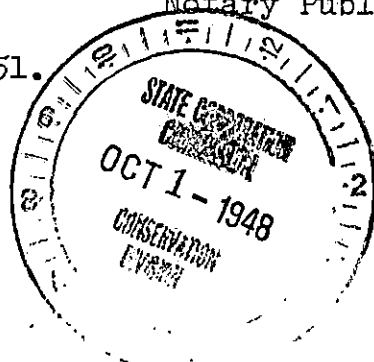

PLUGGING  
FILE SEC 24 T. 16 R. 11W  
BOOK PAGE 62 LINE 15