


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

WELL PLUGGING RECORD

15-009-00626-002

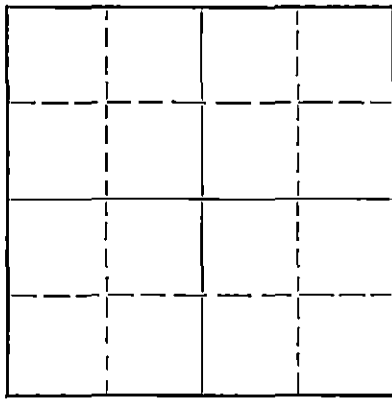

Locate well correctly on above Section Plat

Barton County. Sec. 18 Twp. 16 Rge. 11 (E) (W)
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines SE SE SW
Lease Owner National Cooperative Refinery Association
Lease Name A. Hoffman "G" Well No. 4
Office Address 820 Union National Bank Building
Character of Well (completed as Oil, Gas or Dry Hole) Dry
Date well completed December 21, 19 51
Application for plugging filed December 28, 19 51
Application for plugging approved December 27, 19 51
Plugging commenced December 22, 19 51
Plugging completed December 22, 19 51
Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. C. D. Stough
Producing formation Depth to top Bottom Total Depth of Well 3385 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8 5/8"	330'	Cemented

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy mud to 300', set plug, dumped 15 sacks cement. Filled hole with heavy mud to 35', set plug, dumped 10 sacks cement on up to base of cellar.

WICHITA
STATE C. DIVISION
DEC 29 1951 12-29-51
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to National Cooperative Refinery Association
Address 820 Union National Bank Building
Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
W. Jean La Coss (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. Jean La Coss
820 Union National Bank Building
(Address)

SUBSCRIBED AND SWORN to before me this 28th day of December, 19 51.

I. A. Lange
Notary Public.

My commission expires February 20, 1953

28-5091-s 8-50-10M

PLUGGING
FILE SEC 18 T16 R11
BOOK PAGE 123 LINE X

WELL LOG

Company National Cooperative Refinery Assoc.
Tools Flournoy & Williams

#C-4 Hoffman
SE SE SW 18-14-11
Barton County, Ks.

Commenced December 8, 1951
Completed December 21, 1951

Casing 8 5/8" Cem. 170 sx 330'
Plugged with Cem. 15 sx 300'
Cem. 10 sx 35'


Formation Depth

Surface Soil	50'
Shale & Sand	75'
Sand	100'
Shale & Shells	330'
Cement & Plug	330'
Shale & Shells	510'
Red Bed	760'
Anhydrite	780'
Shale & Shells	1035'
Salt & Shale	1175'
Shale & Shells	1510'
Sandy Lime	1695'
Lime	1800'
Lime & Sand	1925'
Lime & Shale	2350'
Shale & Shells	2600'
Lime & Shale	2760'
Lime	2938'
Lime & Shale	3108'
Lime & Chert	3236'
Lime	3294'
Congl.	3380'
Lime & Cones	3385 1/2' R.T.D.

CERTIFICATION

I, Chester Williams, certify that the above is a true and correct copy of the drillers log of the above well.

Chester Williams /s/



RECEIVED
STATE COMMISSION

JAN 23 1952

COMMISSIONER OF REVENUE
WICHITA, KANSAS