


15009-005650000

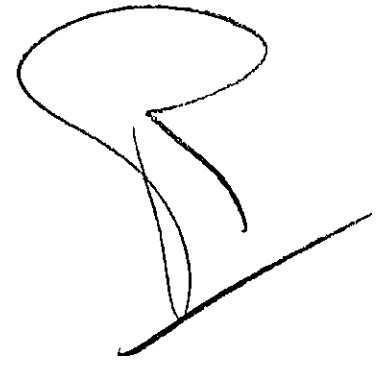

DISTRICT CONSERVATION AGENT'S REPORT

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

FILE NO. _____

LOCATION SE-SE-2E

SEC. 23 TWP. 16 RGE. 11-W

Dry Hole X Abandoned Oil Well _____ Abandoned Gas Well _____

I have today completed supervision of plugging of:

Well No. 1 Lease Beeford

Operator B & R Drilling Co Address Box 232 Russell-Kan-

Field _____ County Barton

Total Depth 3400 Feet.

(Describe briefly the manner in which the well was plugged)

Surface Pipe 8 5/8" 182 ft. Circulated with cement
5 1/2" casing set at 3372 ft. Cemented with 100 sacks cement.
Loss Wells Plug at 3155 ft. Plugged back with chat
& 2970 ft. Mixed 5 sacks of cement at 2970 ft. Shot off
& pulled the 5 1/2" casing. Keel to 182 ft. Set Rock Bridge
& 15 sacks of cement at 182 ft. Mud to 30 ft. Plug
& 10 sacks of cement at the surface.

RECEIVED
STATE CORPORATION COMMISSION

JAN 25 1951

CONSERVATION DIVISION
Wichita, Kansas

C. W. Stouffer
District Conservation Agent

Date 1-23-51

PLUGGING
FILE SEC. 23 T. 16 R. 11 W
BOOK PAGE 54 LINE 29