


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

Finney County, Sec. 24 Twp. 22S Rge. 34 (E) (W)  
Location as "NE/CNWxSWx" or footage from lines C NE NW  
Lease Owner W. L. HARTMAN  
Lease Name MILLER-BUMP Well No. 1  
Office Address P. O. Box 54, Wichita 1, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed 11-1 19 62  
Application for plugging filed 11-2 19 62  
Application for plugging approved 11-5 19 62  
Plugging commenced 11-1 19 62  
Plugging completed 11-2 19 62  
Reason for abandonment of well or producing formation Dry Hole

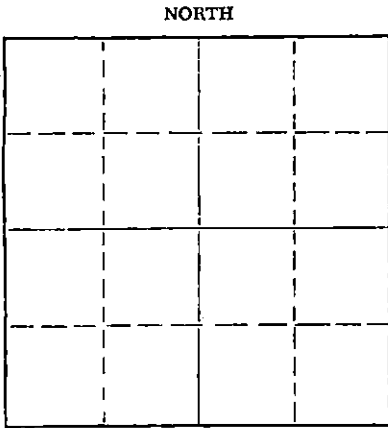

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production \_\_\_\_\_ 19 \_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Hugh Scott, Liberal, Kansas  
Producing formation None Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4954 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	381'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

8-5/8" Surface, common cement circulated.  
Rotary hole filled with drill pipe and pump with 50 viscosity mud, 5 cc water loss.  
Halliburton plug placed at 350' and 35 sacks common cement displaced.  
Halliburton plug placed at 35' and 15 sacks common cement displaced.  
8-5/8" casing cut off and welded shut.

RECEIVED  
STATE CORPORATION COMMISSION

NOV 9 1962

CONSERVATION DIVISION  
Wichita, Kansas

11-9-62

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor \_\_\_\_\_  
Address \_\_\_\_\_

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.  
R. L. SCHMIDLAPP (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. L. Schmidlapp  
P. O. Box 54, Wichita 1, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 8th day of November, 19 62

Ella Priess

Ella Priess Notary Public.

My commission expires August 25, 1964



CERTIFIED DRILLER'S LOG

COMPANY: W. L. Hartman  
 CONTRACTOR: Lonita Oil Corporation, Inc.  
 COMMENCED: October 10, 1962  
 COMPLETED: November 1, 1962  
 ELEVATION: 2925' R. B.  
 LEASE: Miller-Bump  
 LOCATION: 0 NE/4 NW/4 24-22E-34W  
 PINNEY COUNTY, KANSAS  
 CASING RECORD: 381' 8 5/8", Cem. w/275 sacks  
 Dry and Abandoned

<u>FORMATION:</u>	<u>DEPTH:</u>
Clay, Sand & Shale	0-381
Shale, Shells & Sand	381-1020
Shale & Shells	1020-1515
Sand	1515-1750
Shale & Shells	1750-2155
Shale & Lime	2155-3010
Lime	3010-3473
Lime Chalk	3473-3650
Lime	3650-4307
Shale & Lime	4307-4355
Lime	4355-4954
RTD	4954

RECEIVED  
 STATE CORPORATION COMMISSION  
 NOV 9 1962  
 CONSERVATION DIVISION  
 Wichita, Kansas

I hereby certify that this is a true and correct copy of the above log to the best of my knowledge.

R. E. Hartman  
 R. E. Hartman

STATE OF KANSAS )  
 SEDGWICK COUNTY ) SS:

SUBSCRIBED AND SWORN to before me this 5th day of November, 1962.

Ginger Barker  
 Ginger Barker - Notary Public

My Commission Expires:  
October 12, 1964