


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Reno County, Sec. 12 Twp. 23 S Rge. (E) 10 (W)

Location as "NE/CNW/SW" or footage from lines SE/4 SE/4 SE/4
Lease Owner Messman-Rinehart Oil Company
Lease Name Weber Well No. 1
Office Address 1432 Wichita Plaza Bldg., Wichita 2, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed August 5 19 63
Application for plugging filed August 5 19 63
Application for plugging approved August 5 19 63
Plugging commenced August 5 19 63
Plugging completed August 5 19 63
Reason for abandonment of well or producing formation Dry

NORTH

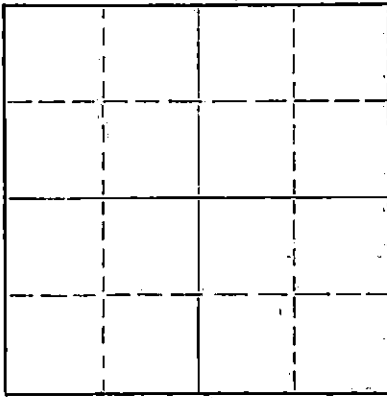

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced?

Name of Conservation Agent who supervised plugging of this well
Producing formation Depth to top Bottom Total Depth of Well 3950 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	253'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Set plug at 250 ft. with 20 sx. cement and 1/4 sk. hulls. Set plug at 40 ft. w/10 sx. cement and 1/4 sk. hulls., 2 sx. cement in rat hole.

RECEIVED
STATE CORPORATION COMMISSION

SEP 4 1963

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Messman-Rinehart Oil Company
Address 1432 Wichita Plaza Bldg., Wichita 2, Kansas

STATE OF Kansas COUNTY OF Sedgwick, ss.
J. A. Gilliland (employee of owner) or (owner) or (operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *J. A. Gilliland*
1432 Wichita Plaza Bldg., Wichita 2, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 12th day of August, 1963
Barbara J. Scott
Barbara J. Scott, Notary Public.

My commission expires December 1, 1964



15-155-61491-0000

NO. 15283

Well Record

Location: SE/4 SE/4 SE/4,
Section 12-235-10W
Reno County, Kansas

Commenced: July 23, 1963

Completed: August 5, 1963

Operator: Messman-Rinehart Oil Company
1432 Wichita Plaza Bldg.
Wichita 2, Kansas

Elevation: 1753' K/B

Production: D & A

Contractor: Messman-Rinehart Oil Company
1432 Wichita Plaza Bldg.
Wichita 2, Kansas

Casing Record: 8-5/8" @ 253' w/185 sx. cement

RECEIVED
STATE CORPORATION COMMISSION

SEP 4 1963

*** L O G ***

CONSERVATION DIVISION
Wichita, Kansas

Sandy Clay	20
Sand	190
Red Bed & Shells	253
Red Bed	450
Shale & Shells	1490
Shale & Lime Shells	1705
Lime & Shale	1850
Shale & Lime	2200
Lime & Shale	2380
Shale	2505
Shale & Lime Shells	2690
Lime & Shale	2890
Lime	3040
Sand & Shale	3155
Lime & Shale	3210
Lime	3540
Shale	3570
Conglomerate (Cherty)	3592
Lime & Chert	3623
Lime & Shale (Cherty)	3655
Shale & Streaks Lime	3740
Shale	3746
Lime	3812
Chalky Lime & Shale	3852
Lime	3935
Arbuckle	3950 R.T.D.

Sample Tags:

2744' - Topeka (-991)
3046' - Hoebner (-1299)
3061' - Toronto (-1308)
3083' - Douglas Sand (-1330)
3200' - Brown Lime (-1455)
3237' - Lansing (-1484)
3532' - Base-Kansas City (-1779)
3572' - Conglomerate (-1819)
3622' - Kinderhook (-1869)
3747' - Viola (-1994)
3862' - Simpson Shale (-2109)
3876' - Simpson Sand (-2123)
3935' - Arbuckle (-2102)

The undersigned, MESSMAN-RINEHART OIL COMPANY, hereby certifies that the above log is a true and correct log of the formation encountered in drilling the above well as reflected by the Daily Drilling Reports.

MESSMAN-RINEHART OIL COMPANY

By:

J. A. Gilliland
J. A. Gilliland

Subscribed and sworn to before me this 12th day of August, 1963

Barbara J. Scott
Barbara J. Scott, Notary Public

My Commission Expires: December 1, 1964