

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
200 Colorado Derby Building
Wichita, Kansas 67202

FORM CP-1
Rev. 2/89

15-055.10011-0601

WELL PLUGGING APPLICATION FORM
(File One Copy)

API NUMBER 1-8-54 (of this well).

(This must be listed; if no API# was issued, please note drilling completion date.)

WELL OWNER/OPERATOR Union Pacific Resources Company OPERATOR'S LICENSE NO. 6417

ADDRESS P. O. Box 7 - MS 3407 Fort Worth, TX 76101- PHONE # (817) 877-7956

LEASE (FARM) Adams SWD WELL NO. #1 WELL LOCATION SW 1/4 COUNTY Finney

SEC. 27 TWP. 22 RGE. 33 ☒ or ☐ (W) TOTAL DEPTH 4268' PLUG BACK TD 4110

Check One:

OIL WELL ☐ GAS WELL ☐ D & A ☐ ☒ (SWD) or INJ WELL ☒ DOCKET NO. 90, 667-C

SURFACE CASING SIZE 10 3/4" SET AT 352' CEMENTED WITH 250 SACKS

CASING SIZE 7" SET AT 4896' CEMENTED WITH 300 SACKS

PERFORATED AT 4258' to 4268' Lansing/Kansas City

CONDITION OF WELL: GOOD ☐ POOR ☐ CASING LEAK ☒ JUNK IN HOLE ☐

PROPOSED METHOD OF PLUGGING Please reference attached proposed plugging program and
attachments.

(If additional space is needed use back of form.)

IS WELL LOG ATTACHED TO THIS APPLICATION AS REQUIRED? Yes IS ACO-1 FILED? Yes,
(If not explain.) Previously

DATE AND HOUR PLUGGING IS DESIRED TO BEGIN Upon all approvals being granted

PLUGGING OF THIS WELL WILL BE DONE IN ACCORDANCE WITH K.S.A. 55-101 et. seq. AND THE
RULES AND REGULATIONS OF THE STATE CORPORATION COMMISSION.

NAME OF REPRESENTATIVE AUTHORIZED TO BE IN CHARGE OF PLUGGING OPERATIONS:

Ed Wallace - Union Pacific Resources Company PHONE # (316) 275-9547

ADDRESS P. O. Box 714, Garden City, Kansas 67864

PLUGGING CONTRACTOR Bids have been solicited. The job has not been awarded yet.
LICENSE NO.

ADDRESS Union Pacific's Employee will supervise the job. Contractor will be
PHONE # () furnished at a later
date.

PAYMENT OF THE PLUGGING FEE (K.A.R. 82-3-118) WILL BE GUARANTEED BY OPERATOR OR AGENT.

Send Bill to:

UPRC-FT. WORTH

ATTN: Joy L. Prohaska

28 1989

SIGNED:

JL Prohaska
(Operator or Agent)

Joy Prohaska

CONSERVATION DIVISION
Wichita, Kansas

DATE:

7/26/89

817-877-7956

7-28-89

PLUGGING PROCEDURE

Adams #1
 Damme Field
 Finney Co., Kansas

RECEIVED
 STATE COMMISSION
 JUL 28 1989
 CONSERVATION DIVISION
 Wichita, Kansas

TD: 4827'
 PBSD: 1029'(TOC)
 Existing Perfs: 4258-68'(LKC)
 Surface Csg: 10-3/4", 32.75# @ 352'
 Prod. Csg: 7", 20# @ 4896'

OBJECTIVE: Plug and abandon SWD well to comply with state regulations.
 (Need KCC representative Steve Drint on location (316) 225-6760)

1. MIRU workover rig. RU elevators and equipment to pull 7" production casing. PU on 7" csg. to unhang from slips.

2. MIRU Dialog and run freepoint test to determine top of cement.

3A. If freepoint of 7" csg. is above 352';(bottom of surface pipe) SD and notify Mid-Continent production. Proceed to step 4.

B. If freepoint of 7" csg. is below 352'; Set a CIBP at 50' below freepoint. Cut off 7" csg at $\pm 450'$ and POH with 7" csg and lay down. (Need welder on location to cut casing at connections.) RIH with 2-3/8" tbg. to 450'. RU Halliburton and spot balance cement plug from 350-450' with 20 sxs Class H neat cement. RD Halliburton and Dialog. Proceed to step 5.

4. Set a CIBP at 50' below freepoint with 1 sx cement.

5. Cut off 10-3/4" surface casing 5' below ground level and restore location. RDMO.

Doug Henrich
 D. S. Henrich 7/19/89

Concur:

Approved:

ADAMSPR

Reminder:

Please keep cement tickets/plugging report from contractor. Send copies to Joy Prohaska to file with plugging report & AC01


SKETCH

Show all casing strings, tubing strings, rod strings, and their O. D. sizes, plug back depth, total depth, casing seats, perforations, liner, screen, packer, and tubing anchor, etc. Show location of equipment in tubing string, junk in the hole, name of producing formations, pumping equipment, etc. All measurements below should be rounded off to nearest foot.

15.055.10011-0001

RECORD

Give detailed casing, tubing, and rod and pump setting below. Show depth to top of items, such as pump, packer, landing nipples, safety joint, tubing anchor, and restrictions in tubing, etc. Give information on how to release packer.

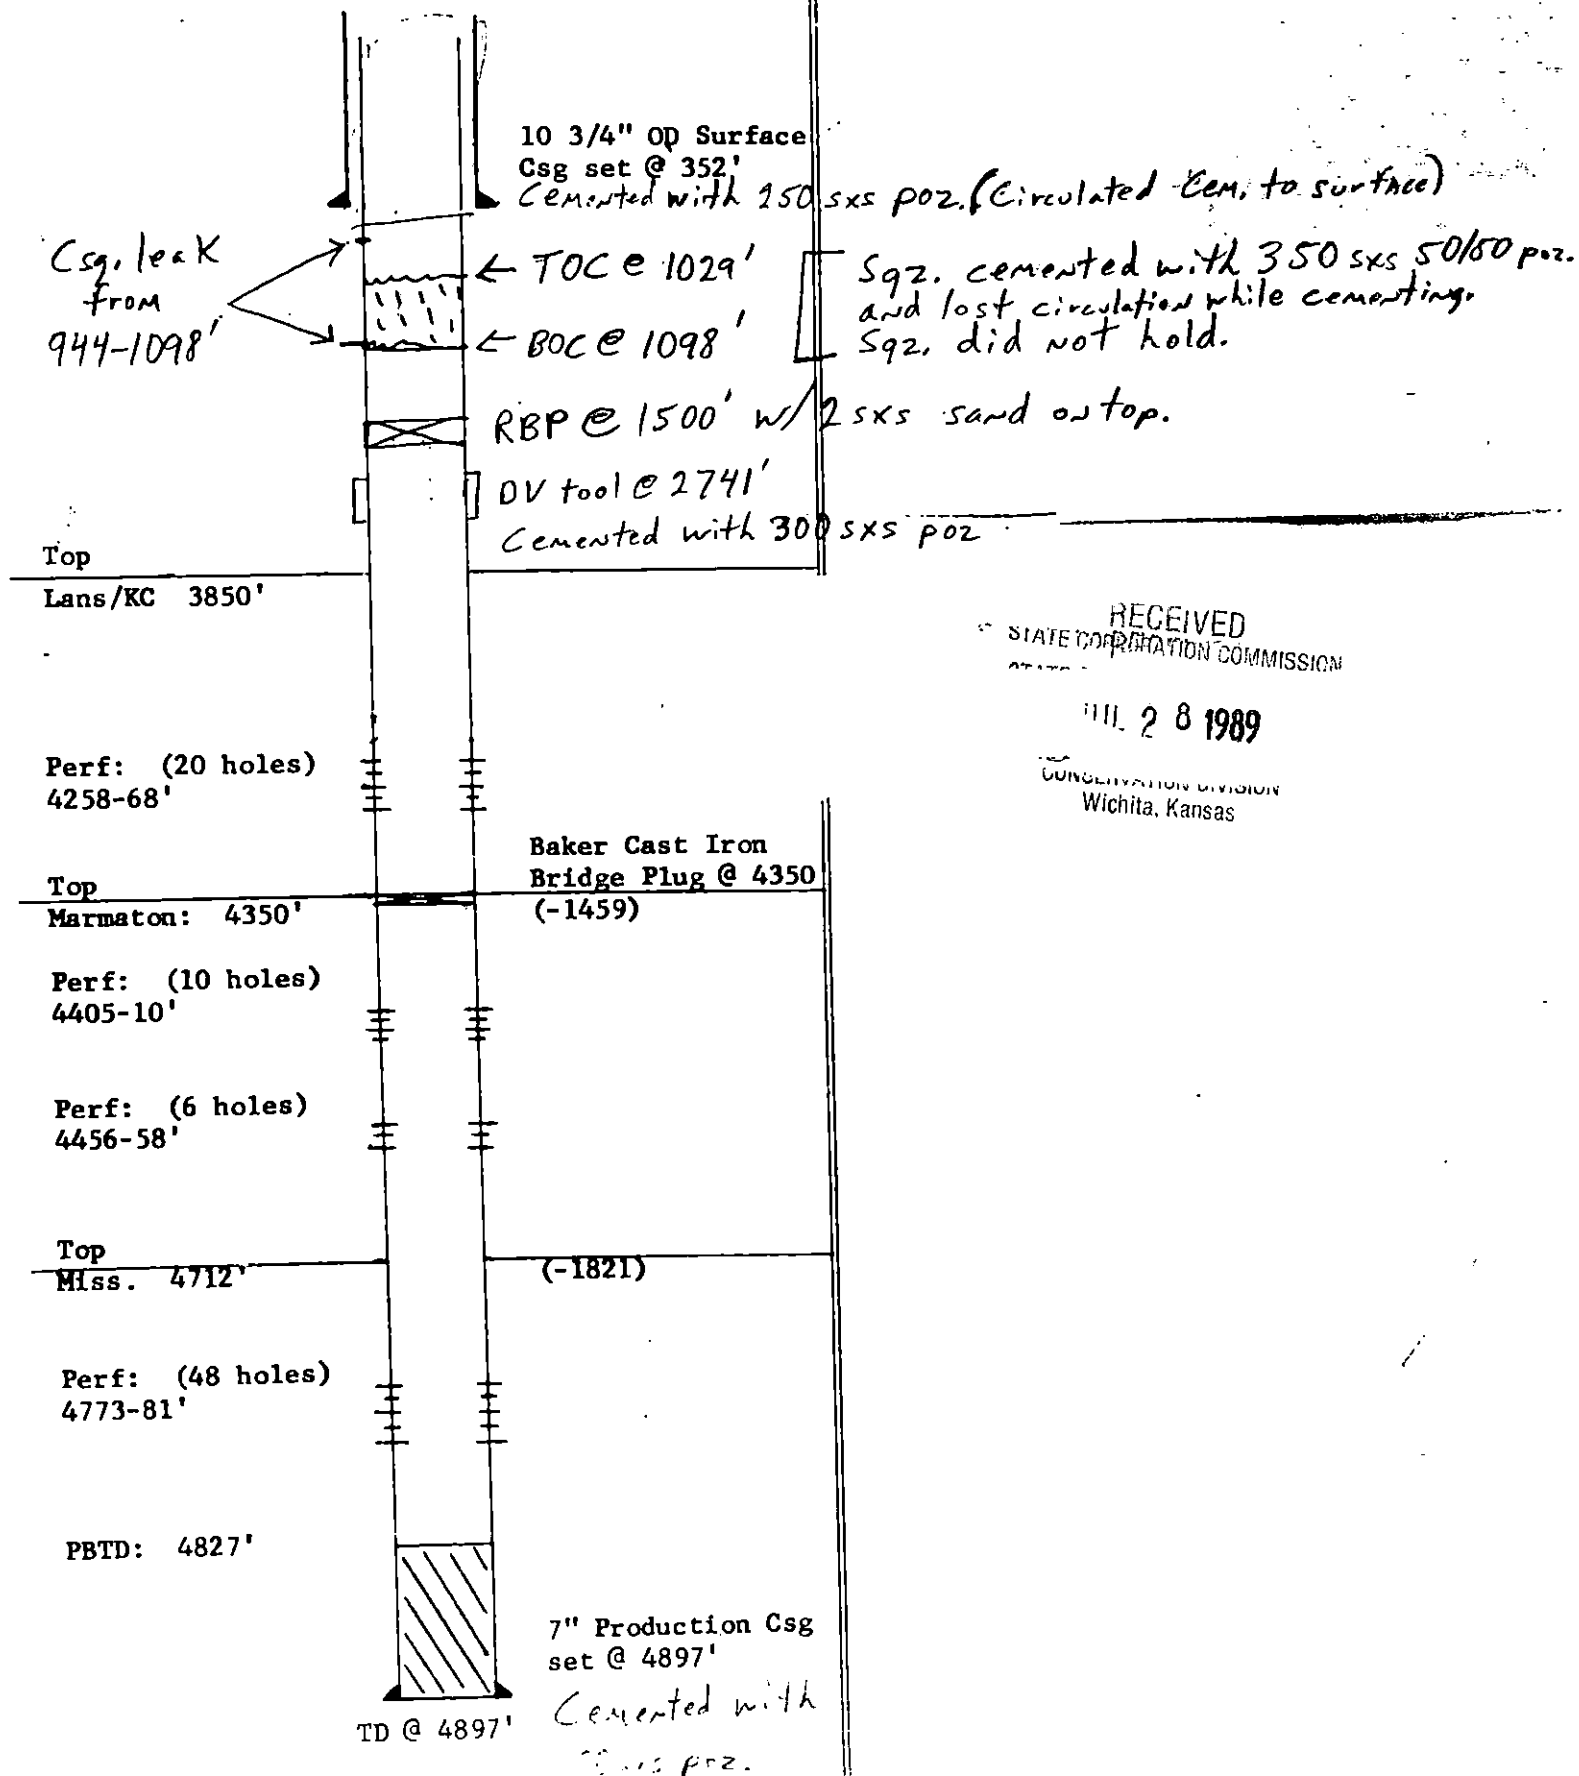



Kansas Corporation Commission

MIKE HAYDEN
KEITH R. HENLEY
RICH KOWALEWSKI
MARGALEE WRIGHT
JUDITH MCCONNELL
FRANK A. CARO, JR.

GOVERNOR
CHAIRMAN
COMMISSIONER
COMMISSIONER
EXECUTIVE DIRECTOR
GENERAL COUNSEL

CONSERVATION DIVISION
SHARI FEIST ALBRECHT, DIRECTOR
200 Colorado Derby Bldg.
202 W. 1st Street
Wichita, KS 67202-1286
(316) 263-3238

August 9, 1989

NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION

Union Pacific Resources Company
P.O. Box - MS 3047
Fort Worth, Tx 76101

Adams SWD #1
SW 1/4
Sec. 27-22-33W
Finney County

Gentlemen:

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.

Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging. Please contact the district office to review your proposed plugging method at least five (5) days before plugging the well.

It has recently come to my attention that the form CP-1 has been filed by operators other than the owner or operator of the well and without the consent of the owner or operator. The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well. The CP-1 is simply reviewed to determine compliance with plugging rules and regulations.

This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.

Sincerely,

Shari Feist Albrecht
Shari Feist Albrecht
Director

District: #1 304 W. McArtor

Dodge City, KS 67801

(316) 225-6760



MIKE HAYDEN
KEITH R. HENLEY
RICH KOWALEWSKI
MARGALEE WRIGHT
JUDITH McCONNELL
FRANK A. CARO, JR.

GOVERNOR
CHAIRMAN
COMMISSIONER
COMMISSIONER
EXECUTIVE DIRECTOR
GENERAL COUNSEL

Kansas Corporation Commission

60-DAY
THIS NOTICE

FEB 14 1990

EXPIRES
Extension
December 14, 1989

CONSERVATION DIVISION
SHARI M. FEIST, DIRECTOR
200 Colorado Derby Bldg.
202 W. 1st Street
Wichita, KS 67202-1286
(316) 263-3238

NOTICE OF RECEIPT OF
WELL PLUGGING EXTENSION REQUEST

Union Pacific Resources Company
P.O. Box 7 - MS 3407
Ft. Worth, TX 76101

Adams SWD #1
SW 1/4
Sec. 27-22-33W
Finney County

Gentlemen:

This letter is to notify you that the Conservation Division is in receipt of your request for an extension of time in which to plug the above-captioned well. You are hereby granted an extension of sixty (60) days in which to plug the well.

Please contact the district office listed below to review your suggested method of plugging at least five (5) days before plugging the well (K.A.R. 82-3-113).

This notice is void after sixty (60) days from the above date.

Any additional extension may be granted for good cause only upon written request to this office.

Sincerely,

Shari Feist Albrecht

Shari Feist Albrecht
Director

District: #1 304 W. McArtor
Dodge City, KS 67801
(913) 225-6760