


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

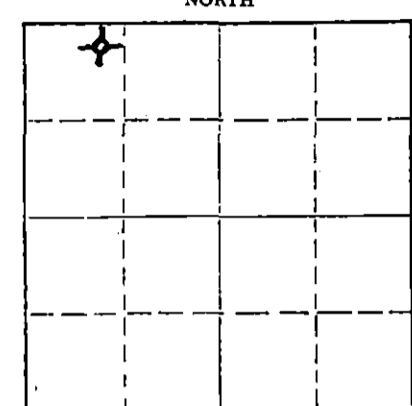

Finney County, Sec. 17 Twp. 22S Rge. 33 (E) W (W)
Location as "NE/CNW/SW" or footage from lines NE NW NW
Lease Owner Champlin Petroleum Company
Lease Name Garden 8272 Well No. 3
Office Address P. O. Box 308, Ellinwood, Kansas 67526
Character of Well (completed as Oil, Gas or Dry Hole) D&A
Date well completed October 24, 1970
Application for plugging filed October 24, 1970
Application for plugging approved October 24, 1970
Plugging commenced October 24, 1970
Plugging completed October 24, 1970
Reason for abandonment of well or producing formation D&A

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Edgar J. Eves
Producing formation Depth to top Bottom Total Depth of Well 4850 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	411'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plug @ 420' w/35 sx cement w/hulls
Plug @ 40' w/15 sx. cement


RECEIVED
STATE CORPORATION COMMISSION
NOV 3 1970
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Red Tiger Drilling Company
Address 1720 Wichita Plaza, Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Jim Farrice (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above described well as filed and that the same are true and correct. So help me God.

(Signature) Jim Farrice
1720 Wichita Plaza, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 28 day of October, 1970.



Virginia K. Albert
Notary Public.

DRILLERS LOG

No. 3 Garden-8272

CASING RECORD:	COMPANY:	DESCRIPTION:
8 5/8" @ 410'	Champlin Petroleum Company	NE NW NW
w/220 sz cement	CONTRACTOR: Red Tiger Drilling Company	17-22S-33W
	COMMENCED: October 6, 1970	Finney County,
	COMPLETED: October 24, 1970	Kansas
TOTAL DEPTH: 4850'		ELEVATION:

FORMATION	FROM	TO	REMARKS
Clay	0	95	
Clay & Sand	95	175	
Shale & Shells	175	890	
Shale	890	965	
Red Bed	965	1349	
Anhydrite	1349	1445	
Shale & Red Bed	1445	1935	
Shale & Lime	1935	2345	
Lime	2345	2414	
Lime & Shale	2414	3845	
Lime	3845	3900	
Lime & Chert	3900	3928	
Lime	3928	3985	
Lime & Chert	3985	4175	
Lime	4175	4525	
Shale & Lime	4525	4555	
Lime, Chalky	4555	4564	
Lime & Chalk	4564	4570	
Shale & Lime	4570	4608	
Lime	4608	4850	

RECEIVED
 STATE CORPORATION COMMISSION
 NOV 3 1970
 CONSERVATION DIVISION
 Wichita, Kansas

I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

Jim Parrica
 Jim Parrica

Subscribed and sworn to before me this 28 day of October, 1970.



Virginia K. Albert
 Notary Public

My Commission Expires:
July 23, 1974