

RECEIVED

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
130 S. Market, Room 2078  
Wichita, KS 67202

FORM CP-1  
Rev.03/92

SEP 17 2003

KCC WICHITA

WELL PLUGGING APPLICATION FORM  
(PLEASE TYPE FORM and File ONE Copy)

API # 15-093-20009-~~8888~~<sup>8001</sup> (Identifier number of this well). This must be listed for wells drilled since 1967; if no API # was issued, indicate spud or completion date.

WELL OPERATOR BP AMERICA PRODUCTION COMPANY KCC LICENSE # 5952  
ADDRESS P. O. BOX 3092, WL 1, RM 3.201 (owner/company name) CITY HOUSTON (operator's)

STATE TEXAS ZIP CODE 77253-3092 CONTACT PHONE # (281) 366-2052

LEASE PATTERSON WELL # 3 SEC. 23 T. 22S R. 38W (East/West)

- N2 - N2 - SE SPOT LOCATION/QQQQ COUNTY KEARNY

4950' FEET (in exact footage) FROM S/N (circle one) LINE OF SECTION (NOT Lease Line)

3880' FEET (in exact footage) FROM E/W (circle one) LINE OF SECTION (NOT Lease Line)

Check One: OIL WELL  GAS WELL  D&A  SWD/ENHR WELL  DOCKET # \_\_\_\_\_

CONDUCTOR CASING SIZE \_\_\_\_\_ SET AT \_\_\_\_\_ CEMENTED WITH \_\_\_\_\_ SACKS

SURFACE CASING SIZE 8 5/8" SET AT 1020' CEMENTED WITH 750 SACKS

PRODUCTION CASING SIZE 5 1/2" SET AT 4970' CEMENTED WITH 350 SACKS

LIST (ALL) PERFORATIONS and BRIDGEPLUG SETS: 3878-4256', 4767-4781', 4917-4924', CTRP04490, 4860, 4970'

ELEVATION 3321 T.D. 4970' PBDT \_\_\_\_\_ ANHYDRITE DEPTH \_\_\_\_\_  
(G.L./K.B.) (Stone Corral Formation)

CONDITION OF WELL: GOOD  POOR  CASING LEAK  JUNK IN HOLE

PROPOSED METHOD OF PLUGGING SEE ATTACHED PROCEDURES

(If additional space is needed attach separate page)

IS WELL LOG ATTACHED TO THIS APPLICATION AS REQUIRED? YES IS ACO-1 FILED? YES

If not explain why? \_\_\_\_\_

PLUGGING OF THIS WELL WILL BE DONE IN ACCORDANCE WITH K.S.A. 55-101 et. seq. AND THE RULES AND REGULATIONS OF THE STATE CORPORATION COMMISSION.

LIST NAME OF COMPANY REPRESENTATIVE AUTHORIZED TO BE IN CHARGE OF PLUGGING OPERATIONS.

SUE SELLERS PHONE # (281) 366-2052

ADDRESS P. O. BOX 3092, WL 1, RM 3.201 City/State HOUSTON, TEXAS 77253-3092

PLUGGING CONTRATOR HALLIBURTON SERVICES KCC LICENSE # 5287 99997  
(company name) (contractor's)

ADDRESS \_\_\_\_\_ PHONE # ( ) \_\_\_\_\_

PROPOSED DATE AND HOUR OF PLUGGING (If Known?) \_\_\_\_\_

PAYMENT OF THE PLUGGING FEE (K.A.R. 82-3-118) WILL BE GUARANTEED BY OPERATOR OR AGENT

DATE: 09/05/03 AUTHORIZED OPERATOR/AGENT: Sue Sellers  
(signature)

15-093-20009-0001

RECEIVED

SEP 17 2003

KCC WICHITA

Plugging Application  
Patterson SWD Well #3  
Section 23 Twp 22S Rng 38W  
Kearney County, Kansas

The application attached is to abandon the Patterson SWD Well #2. BP America Production Company is abandoning this well since it is no longer needed. It is doubtful that commercial production can be restored from the well.

**Plugging Procedure for the Patterson SWD #3  
Section 23 Twp 22S Rng 38W  
Kearney County, Kansas**

RECEIVED

SEP 17 2003

KCC WICHITA

NOTE – NOTIFY KCC DISTRICT OFFICE AT LEAST FIVE DAYS IN ADVANCE OF WORK.

This procedure was approved via a telephone conversation between Joe Eudey (BP representative) and Jim Holland (KCC) on September 2, 2003.


1. Set CIBP at 3800 ft.
2. Fill 5-1/2 inch casing with drilling mud from 3800 ft to 1200 ft.
3. Perforate squeeze holes in casing from 1200-1202.
4. Circulate cement behind 5-1/2 inch casing from 1200 ft to ground level. Fill inside of 5-1/2 inch casing with cmt from 1200 ft to ground level.
5. Cut off and cap casing 5 ft below ground level.
6. Restore location.

15-093-20009-0001

RECEIVED  
SEP 17 2003  
KCC WICHITA

BEFORE PLUGGING AND ABANDONING

**Patterson #3 SWD well**  
**Sec 23 Twp 22S Rng 38W**  
**Kearney County, Kansas**

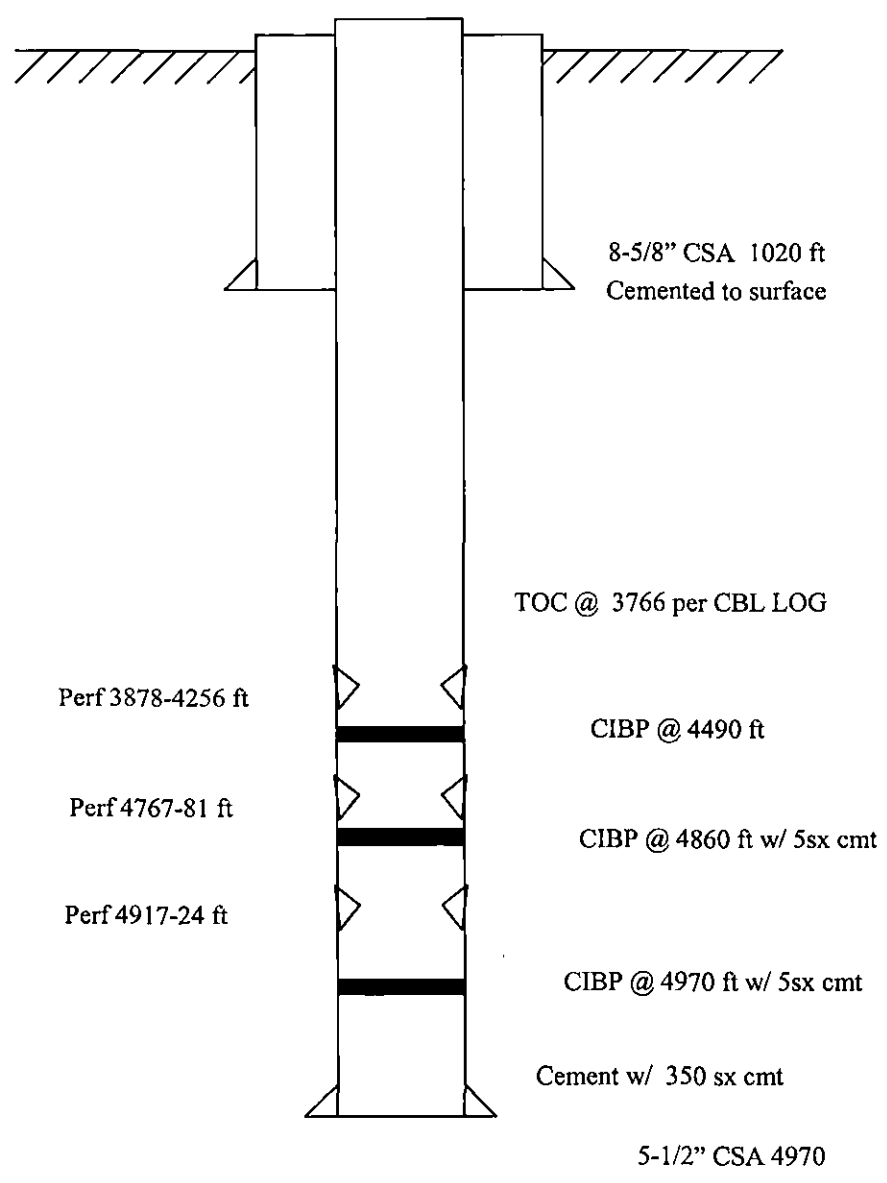

Not to scale

15-093-20009-0001


RECEIVED

SEP 17 2003

KCC WICHITA

AFTER PLUGGING AND ABANDONING

Patterson #3 SWD well  
Sec 23 Twp 22S Rng 38W  
Kearney County, Kansas

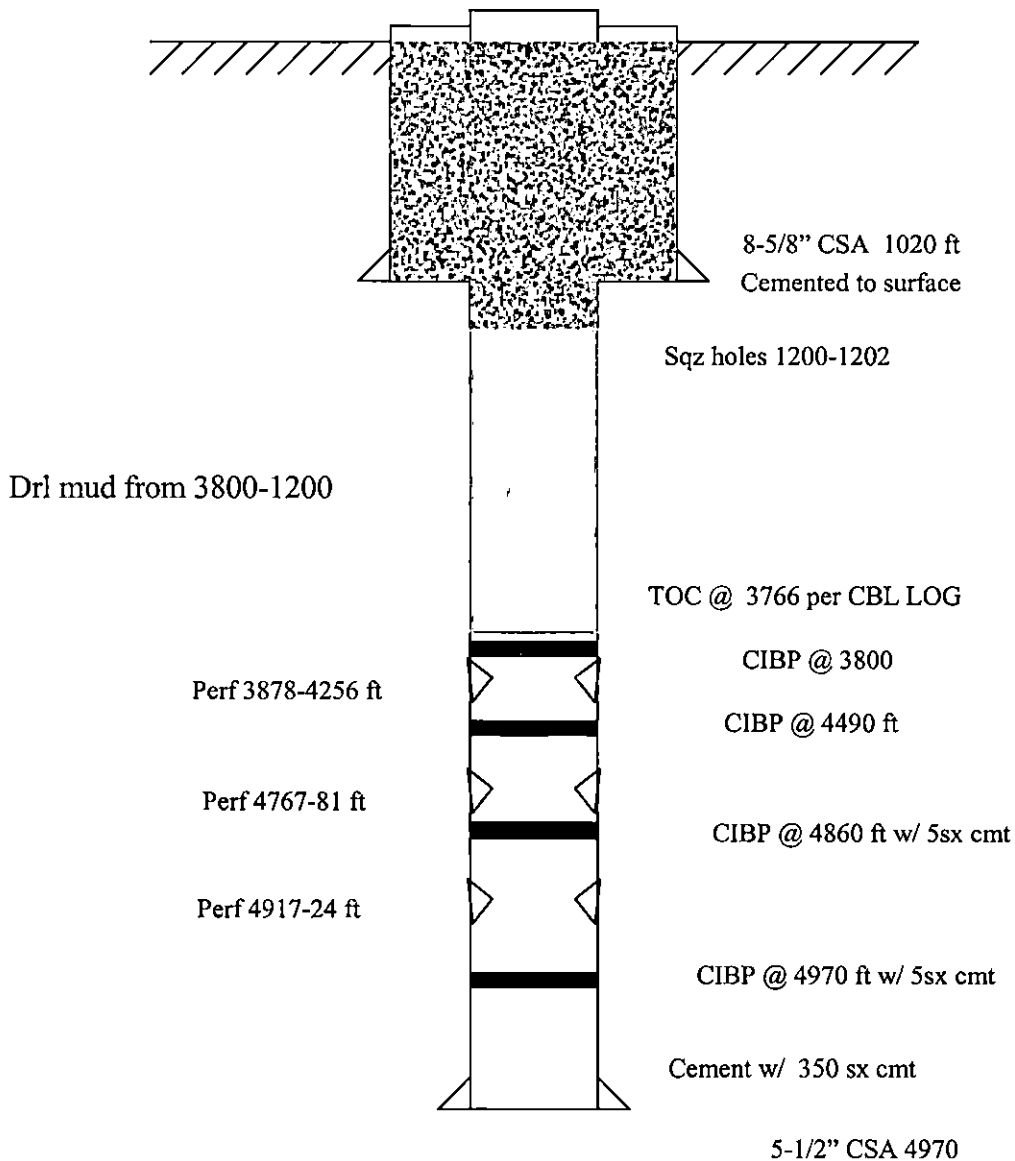

Not to scale



CORPORATION COMMISSION

Kathleen Sebelius, Governor    Brian J. Moline, Chair    John Wine, Commissioner    Robert E. Krehbiel, Commissioner

## NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)

BP America Production Company  
2225 West Oklahoma Avenue  
Ulysses, KS 67880

September 22, 2003

Re: PATTERSON GATES O #3  
API 15-093-20009-00-00  
N2N2SE 23-22S-38W, 4950 FSL 3880 FWL  
KEARNY COUNTY, KANSAS

Dear Operator:

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.

Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

**Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.**

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

**This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.**

District: #1  
210 E Frontview, Suite A  
Dodge City, KS 67801  
(316) 225-8888

Sincerely  


David P. Williams  
Production Supervisor