

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
266 N. Main St., Ste. 220
Wichita, KS 67202-1513

API Well Number: 15-077-00811-00-00
Spot: NENESE Sec/Twnshp/Rge: 1-31S-9W
2310 feet from S Section Line, 330 feet from E Section Line
Lease Name: LYDIA I GAUG Well #: 2
County: HARPER Total Vertical Depth: 4532 feet

Operator License No.: 34357
Op Name: ATLAS OPERATING LLC
Address: 15603 KUYKENDAHL, STE 200
HOUSTON, TX 77090

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		4495		
PROD	5.5	4531		250 SX
SURF	8.625	313		275 SX

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 09/06/2016 12:00 AM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: LARRY PRIEST Company: _____ Phone: (620) 532-9461

Proposed

Plugging Method: Mix and pump 25 sks cement plug at 4380' Perforate at 1500'. Mix and pump 35 sks cement at 1500' Perforate at 1000'.
Mix and pump 35 sks cement at 1000' Perforate at 563'. Mix and pump 40 sks cement from 563 to 263' Set 10 sks surface plug from 30' to 4'

Plugging Proposal Received By: STEVE VANGIESON Witness Type: PARTIAL
Date/Time Plugging Completed: 09/12/2016 12:00 PM KCC Agent: STEVE VANGIESON

Actual Plugging Report:

Perforated casing at 1500'-1000' & 360'. Ran tubing to 4400' & pumped 30 sx cmt. Tagged cmt 4275'. Pulled tubing to 1500' spotted 35 sx cmt. No tag. Pumped 75 sx. No tag. Pumped 160 sks tag at 700'. Pulled tubing to 360' & circulated. 85 sx cmt to fill 5-1/2 casing. Tied onto casing pumped 50 sx to circ cmt up annulus

Perfs:


Top	Bot	Thru	Comments
4430	4494		

Remarks: QWS COMMON CMT

Plugged through: TBG

District: 02

Signed

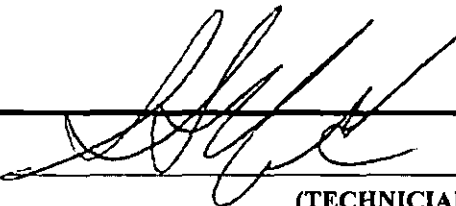

(TECHNICIAN)

Form CP-2/3

NOV 21 2016
No