

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
266 N. Main St., Ste. 220  
Wichita, KS 67202-1513

API Well Number: 15-071-20330-00-00  
Spot: NWNWNW Sec/Twnshp/Rge: 9-20S-39W  
4942 feet from S Section Line, 4935 feet from E Section Line  
Lease Name: MILLER Well #: 1  
County: GREELEY Total Vertical Depth: 2938 feet

Operator License No.: 7271  
Op Name: BARTLING OIL COMPANY  
Address: 1001 CANYON EDGE DR  
AUSTIN, TX 78733

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	2940	0	WITH 400 SX CMT
SURF	8.625	300		WITH 225 SX CMT

Well Type: GAS UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 10/24/2016 10:00 AM  
Plug Co. License No.: 33961 Plug Co. Name: CONSOLIDATED OIL WELL SERVICES LLC  
Proposal Revd. from: GUS OCHNER Company: BARTLING OIL Phone: (620) 376-2249

Proposed Plugging Method: PLUGGING PROPOSAL SAME AS ACTUAL PLUGGING.

Plugging Proposal Received By: KEN JEHLIK Witness Type: COMPLETE (100%)  
Date/Time Plugging Completed: 10/24/2016 12:00 PM KCC Agent: KEN JEHLIK

Actual Plugging Report:

FILL 4 1/2" CASING WITH CMT FROM 2686' TO 0' USING 200 SX CMT, 350# HULLS & 30 7/8" BALL SEALERS. PRESSURE TO 500# & HOLDING. 15 SX CMT DOWN THE ANNULUS TO 300#. TOP OFF 4 1/2" CASING WITH 5 SX CMT.

Perfs:

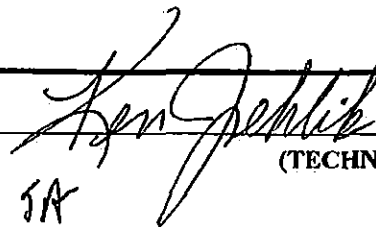
Top	Bot	Thru	Comments
2859	2868		
2850	2856		
2837	2848		
2797	2813		

Remarks: USED 60/40 POZMIX 4% GEL BY CONSOLIDATED.

Plugged through: CSG

District: 01

Signed

  
JA

(TECHNICIAN)

RECEIVED  
OCT 31 2016  
KCC DODGE CITY

NOV 21 2016

Form CP-2/3

720