


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Finney County. Sec. 30 Twp. 22 Rge. 31W(E) (W)
Location as "NE/CNW%SW%" or footage from lines. CNW
Lease Owner A.D. McKelvy
Lease Name Trekell Well No. #1
Office Address 48 Lloyd Drive, Atherton, Calif.
Character of Well (completed as Oil, Gas or Dry Hole) dry hole
Date well completed 2/3/58 19__
Application for plugging filed 4/15/58 19__
Application for plugging approved 4/15/58 19__
Plugging commenced 5/19/58 19__
Plugging completed 5/22/58 19__
Reason for abandonment of well or producing formation dry hole

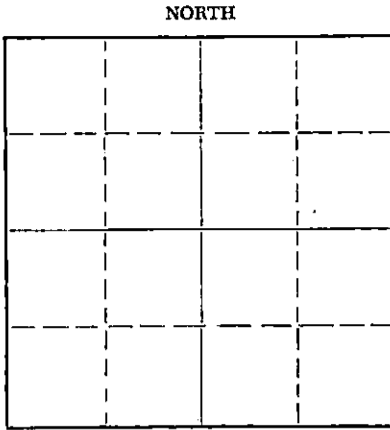

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production _____ 19__
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Merle Rives
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 2775 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Shale W/gyp stks			378	8 5/8"	376*	
Lime & shale			2775	5 1/2"	2774*	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with mud to 350' Set 10' rock bridge Mixed and dumped 20
sx cem. with dump bailer. Bailed fluid. Mud to 35' 10 sx cem. to base
of cellar

SLIP

6-13-58

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Southwest Casing Pulling Co., Inc.
Address P.O. Box 364, Great Bend, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
O.W. Woodland (employee of owner) or (owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. Graham-Michaelis Drig. Co.

(Signature) O.W. Woodland
211 North Broadway - Wichita, Ks.
(Address)

SUBSCRIBED AND SWORN to before me this 11th day of June, 19 58

T.D. Grier

Notary Public.

My commission expires 1-7-61

PLUGGING
FILE SEC 30 T 22 R 31W
BOOK PAGE 93 LINE 28

TREKELL #1

CORRECTED WELL RECORD

LOCATION: Sec. 30-T22-R31W
 Finney County, Kansas
 Commenced: 1/28/58
 Completed: 2/3/58
 (rotary)

OPERATOR: Graham-Michaelis Drlg. Co.
 211 North Broadway
 Wichita, Kansas

CONTRACTOR: Graham-Michaelis Drlg. Co.
 211 North Broadway
 Wichita, Kansas

CASING RECORD: 8 5/8" 28# 8rd @376.26' W/200 sks common cement
 5 1/2" 14# 8rd @2774 W/300 sks common cement

LOG

Soil, clay	90
Sand	210
Shale W/gyp stks	378
Blue shale, shells	875
Red bed, gyp	942
Sand, shells	1062
Gyp	1070
Gyp, clay	1235
Gyp, red bed	1350
Red bed, shale	1386
Red bed, anhy	2075
Red bed, shale	2458
Red bed, anhy	2640
Lime, shale	2745
Lime, shale	2775 RTD

STATE OF KANSAS)
) ss.
 COUNTY OF SEDGWICK)

RECEIVED
 CONSERVATION COMMISSION

JUN 13 1958

CONSERVATION DIVISION
 Wichita, Kansas

The undersigned, GRAHAM-MICHAELIS DRILLING CO., hereby certifies that the above log is a true and correct log of the formations encountered in drilling the above well as reflected by the Daily Drilling Report.

GRAHAM-MICHAELIS DRILLING COMPANY

By John L. James
 John L. James
 Geologist

Subscribed and sworn to before me this 21st day of March, 1958.

T. D. Greer

My commission expires 1-7-60

PLUGGING
 FILE SEC 30 T 22 R31W
 BOOK PAGE 93 LINE 28