


STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

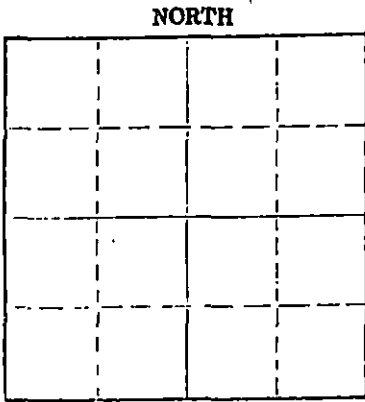

Locate well correctly on above Section Plat

Hodgeman County, Sec. 26 Twp. 22S Rge. (X) 24 (W)
Location as "NE/CNW/SW" or footage from lines C SW NE
Lease Owner Cities Service Oil Company
Lease Name DAVIS "D" Well No. 2
Office Address 700 Sutton Place, Wichita, Ks. 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed April 24 1975
Application for plugging filed (verbal) April 24 1975
Application for plugging approved (verbal) April 24 1975
Plugging commenced April 24 1975
Plugging completed April 24 1975
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes (verbally)

Name of Conservation Agent who supervised plugging of this well Clarence Thomas
Producing formation Depth to top Bottom Total Depth of Well 4707'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	342'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

1st Plug Set @ 900' with 50 sx.
2nd Plug Set @ 360' with 35 sx.
3rd Plug Set @ 40' with 10 sx.
Plugged rat hole with 2 sx.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Abercrombie Drilling, Inc.
Address 801 Union Center, Wichita, Kansas 67202


STATE OF KANSAS COUNTY OF SEDGWICK
Jerry A. Langrehr, Exec. V.P. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *Jerry A. Langrehr*
801 Union Center, Wichita, Ks. 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 29th day of April 1975

April 8, 1978

Nancy E. Hanes
Notary Public.



RECEIVED
STATE CORPORATION COMMISSION
APR 18 1978
CONSERVATION DIVISION
Wichita, Kansas

4-30-75

CONTRACTOR'S WELL LOG

OPERATOR: Cities Service Oil Company
 CONTRACTOR: Abercrombie Drilling, Inc.
 WELL NAME: DAVIS "D" #2
 LOCATION: C SW NE Section 26-22S-24W
 Hodgeman County, Kansas

SPUD DATE: April 13, 1975
 COMPLETION DATE: April 24, 1975

0	308	Sand
308	343	Shale
343	700	Sand
700	1617	Sand & Shale
1617	1632	Anhydrite
1632	3483	Shale & Lime
3483	4465	Lime & Shale
4465	4585	Lime
4585	4618	Lime & Shale
4618	4707	Lime
	4707	Rotary Total Depth

Set 8-5/8" surface casing @342'. Cemented w/250 Sx. 50/50 Posmix, 2% Calcium Chloride. Cement circulated. Plug down @ 11:10 a.m., April 13, 1975.
 Plugged and Abandoned: 1st Plug Set @ 900' w/50 sx., 2nd Plug Set @360' w/35 sx., 3rd Plug Set @40' w/10 sx., Plugged rat hole with 2 sx.

STATE OF KANSAS)
) SS
 COUNTY OF SEDGWICK)

Jerry A. Langrehr, Executive Vice President of Abercrombie Drilling, Inc., does hereby state that the above and foregoing is a true and correct copy of the log of the DAVIS "D" #2, C SW NE Section 26-22S-24W, Hodgeman County, Kansas.

ABERCROMBIE DRILLING, INC.
 By: Jerry A. Langrehr
 Jerry A. Langrehr
 Executive Vice President

Subscribed and sworn to before me, a Notary Public, in and for the aforesaid county and state as of this 29th day of April, 1975.

Nancy E. Haner
 Nancy E. Haner, Notary Public

