


STATE OF KANSAS  
STATE CORPORATION COMMISSION

## WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Locate well correctly on above  
Section Plot

Hodgeman County. Sec. 19 Twp. 22S Rge. 24W E/W  
Location as "NE/CNW $\frac{1}{2}$ SW $\frac{1}{2}$ " or footage from lines  
C NE NE

Lease Owner Okmar Oil Company  
Lease Name Frances Well No. 1  
Office Address 970 Fourth Financial Center, Wichita, Ks.  
Character of Well (Completed as Oil, Gas or Dry Hole)  
dry hole

Date Well completed May 20, 1977 19  
Application for plugging filed May 20, 1977 19  
Application for plugging approved May 20, 1977 19  
Plugging commenced May 20, 1977 19  
Plugging completed May 20, 1977 19  
Reason for abandonment of well or producing formation  
dry hole

If a producing well is abandoned, date of last production  
19

Was permission obtained from the Conservation Division or  
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Clarence Thomas  
Producing formation Depth to top Bottom Total Depth of Well  
Show depth and thickness of all water, oil and gas formations.

## OIL, GAS OR WATER RECORDS

## CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	250	8-5/8"		

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set. Hole plugged as follows: plugged @ 900' with 50 sacks 50-50 pozmix, 6% gel; plugged @ 500' with 30 sx. 50-50 pozmix, 6% gel; plugged @ 240' with 35 sx. 50-50 pozmix, 6% gel; plugged at 40' with 15 sx. 50-50 pozmix, 6% gel; plugged mousehole and rathole with 5 sx. each. Plug down at 3:00 p.m., May 20, 1977.

RECEIVED  
STATE CORPORATION COMMISSION

JUL 05 1977

CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use back of this sheet)

Name of Plugging Contractor

STATE OF KANSAS COUNTY OF BARTON, ss.  
Kenneth J. Link (employee or owner or operator)  
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Kenneth J. Link President  
Box 355, Great Bend, Kansas 67530  
(Address)

SUBSCRIBED AND SWORN TO before me this 31st day of May, 1977.

Loneita Barry  
Loneita Barry Notary Public.

My commission expires 3-28-80



D R I L L E R S      L O GFrances #1

CASING RECORD: 244.67' used 8-5/8" surface casing	COMPANY: Okmar Oil Company	DESCRIPTION: C NE NE Section 19-22S-24W Hodgeman County, Kansas
TOTAL DEPTH: 4715'	CONTRACTOR: Strata Drilling Company	ELEVATION: 2492 DF
	COMMENCED: May 13, 1977	
	COMPLETED: May 20, 1977	

D &amp; A

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Surface soil and shale	0	270	Ran 244.67' used 8-5/8" surface casing
Shale and sand, shale	270	1683	set and cemented @ 250' with 175 sx.
Anhydrite	1683	1717	common cement, 2% gel, 3 % C.C.,
Shale	1717	2665	cement circulated. Plug down 10:00 p.m.,
Lime	2665	2910	May 13, 1977.
Lime and shale	2910	4220	
Lime	4220	4375	
Lime and shale	4375	4685	Ran one Drill Stem Test.
Mississippi	4685	4715	

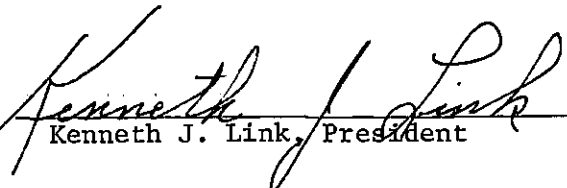
Hole plugged as follows: plugged @  
900' with 50 sx. 50-50 pozmix, plugged  
@ 500' with 30 sx. 50-50 pozmix,  
plugged @ 240 with 35 sx. 50-50 pozmix,  
plugged @ 40' with 15 sx. 50-50 pozmix,  
5 sx. each in mousehole and rathole.  
Plug down 3 p.m., May 20, 1977.

RECEIVED  
STATE CORPORATION COMMISSION  
JUL 05 1977  
CONSERVATION DIVISION  
Wichita, Kansas

STATE OF KANSAS )  
                          ) ss  
COUNTY OF BARTON)


I certify that this is a true and correct copy of the above log to the  
best of my knowledge.

STRATA DRILLING COMPANY

  
Kenneth J. Link, President

Subscribed and sworn to before me this 31st of May, 1977.

My commission expires: 3-28-80.

  
Loneita Barry, Notary Public

