


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
P. O. Box 17027  
Wichita, Kansas 67217  
NORTH

WELL PLUGGING RECORD

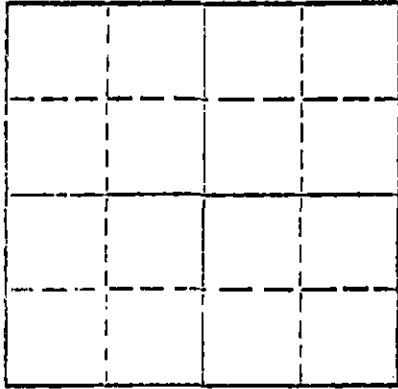

Locate well correctly on above  
Section Plat

Hodgeman County, Sec. 12, Twp. 22, Rge. (E) 24 (W)  
Location as "NE/CNW/SW" or footage from lines C NE SW/4  
Lease Owner Kaiser-Francis Oil & Gas Company  
Lease Name Cossman "A" Well No. 1  
Office Address 4120 East 51st Street, Tulsa, Okla. 74135  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed 8/31/75 19 75  
Application for plugging filed " " " 19 "  
Application for plugging approved " " " 19 "  
Plugging commenced 19  
Plugging completed 7:00 A.M. 8/31/75 19  
Reason for abandonment of well or producing formation Dry Hole  
Mississippi

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Clarence Thomas, Garden City, Kansas  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4738 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	8-5/8"	0	358'			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.  
Hole plugged as follows: Plugged at 900' with 50 sacks of common cement; plugged at 400' with 35 sacks of common cement; plugged at 40' with 15 sacks of common cement; 2 sacks of common cement in rathole. Plugged at 7:00 A.M., August 31, 1975.


RECEIVED  
STATE CORPORATION COMMISSION  
SEP 11 1975 9-11-75  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Strata Drilling Company  
Address P.O. Box 355, Great Bend, Kansas 67530

STATE OF KANSAS, COUNTY OF BARTON, ss.  
Kenneth J. Link (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Kenneth J. Link  
Kenneth J. Link, President  
P. O. Box 355, Great Bend, Kansas 67530  
(Address)

Subscribed and sworn to before me this 5 day of September, 19 75  
Joy Selves Notary Public.  
My commission expires 11-30-75



D R I L L E R S L O G

#1 Cossman "A"

CASING RECORD:  
358' of new 8-5/8"  
surface casing

COMPANY: Kaiser-Francis Oil Co.      DESCRIPTION: C NE SW  
Sect. 12-22S-24W  
CONTRACTOR: Strata Drilling Company Hodgeman County, Kans.  
COMMENCED: August 21, 1975  
COMPLETED: August 31, 1975

D. &amp; A.

<u>FORMATION:</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Surface Shale	0	360	Ran 356.30' of new 8-5/8"
Shale & Red Bed	360	1723	surface casing, set & cemented
Anhydrite	1723	1760	at 358' with 215 sacks of
Shale & lime	1760	3745	50-50 Pozmix and 3% C.C.
Lime W/Shale Streaks	3745	4685	Plug down at 5:15 A.M.
Shale - Dolomite	4685	4738	August 22, 1975

ROTARY TOTAL DEPTH: 4738'

Ran 5 drill stem tests

Ran Electric Log

D. &amp; A.

Hole plugged as follows:  
Plugged at 900' with 50  
sacks of common cement;  
plugged at 400' with 35  
sacks of common cement; plugged  
at 40' with 15 sacks of  
common cement; 2 sacks of  
common cement in rathole.  
Plug down at 7:00 A.M.  
August 31, 1975

RECEIVED  
STATE CORPORATION COMMISSION

SEP 11 1975

CONSERVATION DIVISION  
Wichita, Kansas

STATE OF KANSAS }  
County of Barton } s.s.

I certify that this is a true and correct copy of the above log to the best  
of my knowledge.

STRATA DRILLING COMPANY

*Kenneth J. Link*  
Kenneth J. Link, President

Subscribed and sworn to before me this 5th day of September, 1975.

My Commission Expires: . . .

November 30, 1975

*Joy Selves*  
Joy Selves, Notary Public