


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Hodgman County. Sec. 12 Twp. 22 Rge. 24 E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines _____

SE NW
Lease Owner Thunderbird Drilling, Inc.
Lease Name Blount #1 Well No. _____
Office Address Ellinwood, Kansas 67526
Character of Well (Completed as Oil, Gas or Dry Hole) _____

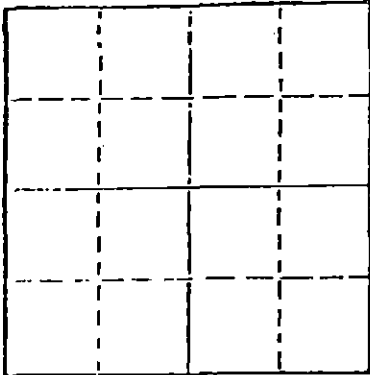

Locate well correctly on above
Section Plot

Date Well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 3/23/77 _____ 19____
Plugging completed 3/31/77 _____ 19____
Reason for abandonment of well or producing formation
depleted.
If a producing well is abandoned, date of last production _____ 19____

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Thomas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4712
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	348	none
				4 1/2"	4689	2630'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Pumped plug on bottom with 2 sacks hulls and 15 sacks cement. Shot pipe at 4016', 3528', 3002', 2903', 2811', 2714', 2616', pulled 81 joints. Pumped 2 sacks hulls, 50 sacks cement, 10 sacks gel, 35 sacks cement, 20 sacks gel, plug and 15 sacks cement.

PLUGGING COMPLETE.

APR 05 1977

4-5-77

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KELSO CASING PULLING
CHASE, KANSAS


STATE OF KANSAS COUNTY OF RICE, ss.
R. DARRELL KELSO. (employee of owner) or (owner or operator)

of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. Darrell Kelso
CHASE, KANSAS
(Address)

SUBSCRIBED AND SWORN TO before me this 31st day of March, 19 77

My commission expires



Margaret Melcher
Notary Public.