


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

WELL PLUGGING RECORD

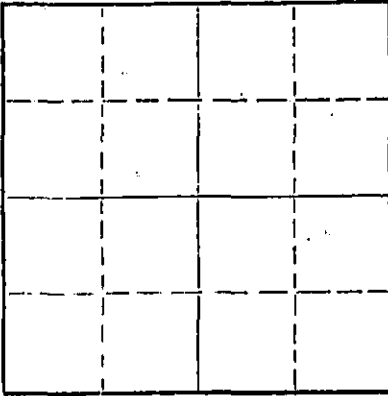

Locate well correctly on above
Section Plat

HODGEMAN County. Sec. 4 Twp. 22 Rge. (E) 21 (W)
Location as "NE/CNW&SW" or footage from lines. C NE NW
Lease Owner MELVIN BRYANT - ISERN WELLS
Lease Name MEYERS Well No. 1
Office Address Box 486, Ellinwood, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) DRY HOLE
Date well completed 12/6 19 73
Application for plugging filed 12/6 19 73
Application for plugging approved 12/6 19 73
Plugging commenced 12/6 19 73
Plugging completed 12/6 19 73
Reason for abandonment of well or producing formation DRY HOLE

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well EDGAR EVES, SUBLETTE, KS.
Producing formation Depth to top Bottom Total Depth of Well 4390 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface sand, clay, shale and clay		0	394	8 5/8	394	0

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plug #1, 80 sx common @ 800'
Plug #2, Circ. cement from 350' to top of surface
Approx. 150 sx cement, 50-50 Posmix
Completed at 3:30 AM 1973

RECEIVED
STATE CORPORATION COMMISSION
DEC 10 1973
CONSERVATION DIVISION
Wichita, Kansas


Name of Plugging Contractor GABBERT-JONES, INC.
Address 830 Sutton Place, Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, SS.
Gabbert-JONES, INC. (employee of owner) or (owner) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jack W. Gabbert
830 Sutton Place, Wichita, Kansas (Address)

Subscribed and sworn to before me this 7 day of December, 19 73



Marjorie Hall
Notary Public.

My commission expires Nov. 29, 1975

GABBERT-JONES, INC.
WICHITA, KANSAS
DRILLERS' WELL LOG


MEYERS #1
C NE NW, Sec. 4-22S-21W
Hodgeman County, Kansas

Commenced: November 24, 1973
Completed: December 6, 1973

OPERATOR: MELVIN BRYANT - ISERN WELLS

Depth From	To	Formation	Remarks
0	75	Surface sand-clay	Ran 18 joints of used 28# 8 5/8" csg.
75	255	Shale	set @ 394' cemented w/225 sks
255	400	Shale-clay	common, 3% CC, 2% Gel
400	740	Shale-sand-redbed	P.D. 5 AM 11/25/1973
740	930	Sand	Cement Circ.
930	1296	Shale	
1296	1338	Anhydrite	
1338	1580	Shale	
1580	1883	Shale w/lime stks	
1883	2330	Lime-shale	
2330	2705	Shale-lime	
2705	2840	Lime-shale	
2840	3080	Shale-lime	
3080	3325	Lime-shale	
3325	3825	Lime	
3825	3900	Lime-shale	
3900	4390	Lime	DRY AND ABANDONED
4390		TD	


I, James S. Sutton, II, certify this is a correct copy of the Drillers' Log for the well drilled in the C NE NW, Section 4-22S-21W, Hodgeman County, Kansas, to the best of my knowledge and belief.

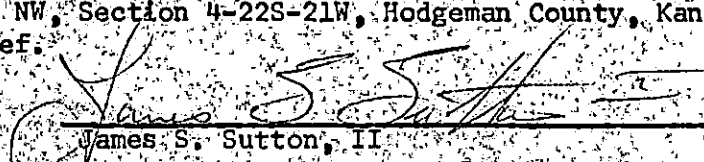
James S. Sutton, II

STATE OF KANSAS)
) SS
COUNTY OF SEDGWICK)

Before me, the undersigned, a Notary Public within and for said County and State, on this 7th day of December, 1973, personally appeared James S. Sutton, II to me personally known to be the identical person who executed the within and foregoing instrument and acknowledged to me that he executed the same as his free and voluntary act and deed for the uses and purposes therein set forth.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal the day and year last above written.


Marjorie Hall, Notary Public

My Commission expires
November 29, 1975.

