


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Kingman County, Sec. 26 Twp. 30 Rge. (E) 9 (W)
Location as "NE/CNW%SW%" or footage from lines NW SE SE
Lease Owner Petroleum, Inc.
Lease Name HOLCOMB ESTATE 'A' Well No. 1
Office Address 311 East Third, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed April 6 19 56
Application for plugging filed April 6 19 56
Application for plugging approved April 6 19 56
Plugging commenced April 6 19 56
Plugging completed April 6 19 56
Reason for abandonment of well or producing formation Dry Hole

NORTH

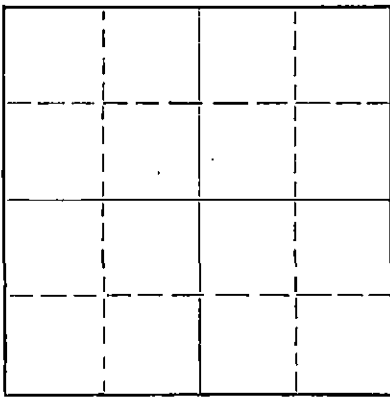

Locate well correctly on above
Section Flat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Mr. M. A. Rives, Pratt, Kansas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 411' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	190'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Mudded up with heavy mud to 190', pushed down
1/4 sack hulls to 190' followed by wooden plug.
Placed 20 sacks cement through drill pipe on top
of plug. Mud up to 35' and place 1/4 sack hulls at
35' followed by wooden plug and 10 sacks cement
to base of well cellar.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Garvey Drilling Company
Address R. R. #2 - Great Bend, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Cullen Thomas (employee of owner) or (owner-or-operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Cullen Thomas
311 East Third, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 7th day of April 19 56
Frances Sloan
Notary Public.

My commission expires September 2, 1959

FRANCES SLOAN, Notary Public
My Commission expires Sept. 2, 1959

PLUGGING
FILE SEC 26 T 30 R 9W
BOOK PAGE 52 LINE 4

APR 17 1956
CONSERVATION DIVISION
WICHITA, KANSAS

WELL LOG

15-095-00059-0000

COMPANY **Petroleum, Inc.**

SEC. 26 T. 30S R. 9W

FARM **HOLCOMB ESTATE 'A'** NO. 1

LOG. NW SE SE
1040' FEL
990' FSL


TOTAL DEPTH **4414'**

COUNTY **Kingman**

COMM. **March 22, 1956**

COMP. **April 6, 1956**

CONTRACTOR **Garvey Drilling Company**



CASING **8-5/8" @ 190' w/150 sax**

ELEVATION **1612' DF**
1614' RB

PRODUCTION **D & A**


FIGURES INDICATE BOTTOM OF FORMATIONS

190	Shale & Red Bed
400	Red Bed
1600	Shale & Shells
1960	Lime & Shale
1990	Lime
2060	Shale
2195	Shale & Lime
2310	Shale
3338	Shale & Lime
3352	Shale
3369	Lime & Shale
3435	Sand
3555	Sand & Shale
3618	Lime & Shale
4086	Lime
4135	Lime & Shale
4190	Lime
4218	Lime & Shale
4266	Shale
4310	Lime & Shale
4352	Shale & Chert
4414	Lime & Shale

Sample Tops

Heebner	3360 (-1746)
Toronto	3376 (-1762)
Douglas	3395 (-1781)
Lansing	3582 (-1968)
Conglomerate	4272 (-2658)
Miss. Chert	4314 (-2700)
Miss Lime	4328 (-2714)

RTD 4414'

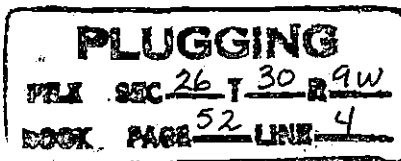

State of KANSAS

County of SEDGWICK

I, Cullen Thomas of Petroleum, Inc.

upon oath state that the above and foregoing is a true and correct copy of the log of the HOLCOMB ESTATE 'A' #1 well

APR 17 1956

Subscribed and sworn to before me this 12th day of April 19 56
Wichita, Kansas

My Commission Expires: September 2, 1959

Frances Sloan
NOTARY PUBLIC

FRANCES SLOAN, Notary Public
My Commission expires Sept. 2, 1959