


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit,
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Hodgeman County. Sec. 21 Twp. 22S Rge. (E)21 (W)

NORTH



Locate well correctly on above
Section Plat

Location as "NE/CNW&SW" or footage from lines C NE NE
Lease Owner Pickrell Drilling Company
Lease Name Fall "A" Well No. 1
Office Address 705 4th National Bank Bldg, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed May 21, 19 66
Application for plugging filed May 21, 19 66
Application for plugging approved May 21, 19 66
Plugging commenced May 21, 19 66
Plugging completed May 21, 19 66
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Edgar J. Eves
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4498 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	304'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Heavy mud to 700', set plug, cemented with
30 sacks cement. Heavy mud to 350', set plug
cemented with 35 sacks cement. Heavy mud to 45',
set plug. Cemented with 15 sacks cement to bottom
of cellar. Plugged rat hole with 2 sacks cement.

RECEIVED
STATE CORPORATION COMMISSION

JUN - 2 1966


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Pickrell Drilling Company
Address 705 4th National Bank Building, Wichita 2, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

C. W. Sebits (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C. W. Sebits,
705 4th National Bank Bldg, Wichita, Kansas
(Address)

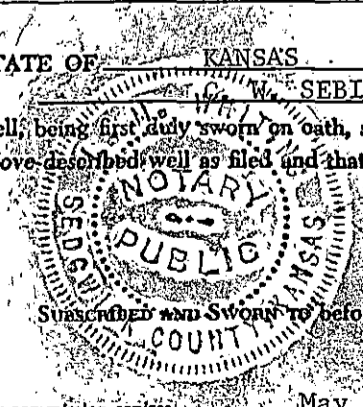

Subscribed and sworn to before me this 31st day of May 1966

My commission expires May 10, 1970

L. M. Whiting
Notary Public.

ROTARY DRILLING LOG

15.083-30089-0000

COMPANY: PICKRELL DRILLING COMPANY
705 4th National Bank Bldg.
Wichita, Kansas

Rotary Drilling Commenced 5-10-66

Rotary Drilling Completed 5-21-66

LOCATION: Fall "A" No. 1, C NE NE Section 21-22-21W, Hodgeman County, Kansas.

CONTRACTOR: PICKRELL DRILLING COMPANY
Wichita, Kansas

CASING RECORD: (14 jts) 8 5/8" surface casing set at 304', cemented with 175 sacks cement. Circulated. Completed 7:15 P.M., May 10, 1966. No oil string run. D. & A.

LOG

(Figures indicate bottom of formation— measurements from top of rotary bushing.)

40	Clay & Surface Soil	C. F. S.
250	Shale & Shells	4370
270	Sand Streaks	4395
304	Shale & Shells	4401
652	Shale, Shells & Red Beds	4410
675	Blaine	4415
760	Shale & Shells	4420
980	Sand	4425
1312	Shale & Shells	4430
1343	Anhydrite	4435
1790	Shale & Shells	4445
2190	Lime & Shale	4455
2485	Lime	4498
3975	Lime & Shale	4505
4080	Lime	
4166	Lime & Shale	Slope Test
4250	Lime	2500
4410	Lime & Shale	3000
4420	Lime	3500
4435	Lime, Shale & Chert	4000
4498	Mississippian - RTD	
		S. L. M.
		3672
		3987
		4293

RECEIVED
STATE CORPORATION COMMISSION

JUN - 2 1966

CONSERVATION DIVISION
Wichita, Kansas

The undersigned, C. W. SEBITS, Attorney-in-Fact for PICKRELL DRILLING COMPANY, hereby certifies in behalf of said Company, that the above is a true and correct log of the formation encountered in drilling the above well as reflected by the Daily Drilling Reports.

PICKRELL DRILLING COMPANY

By C. W. SEBITS, Attorney-in-Fact.

STATE OF KANSAS }
COUNTY OF SEDGWICK } ss.:

On this 13th day of May, 1966, before me the undersigned, a Notary Public, in and for the County and State aforesaid, personally appeared C. W. SEBITS, to me known to be the identical person who subscribed the name of PICKRELL DRILLING COMPANY to the foregoing instrument as its Attorney-in-Fact and acknowledged to me that he executed the same as his free and voluntary act and deed, and as the free and voluntary act and deed of such company, for the uses and purposes therein set forth.

Given under my hand and seal of office the day and year last above written.

My commission expires May 10, 1970

L. M. Whiting
L. M. Whiting, Notary Public