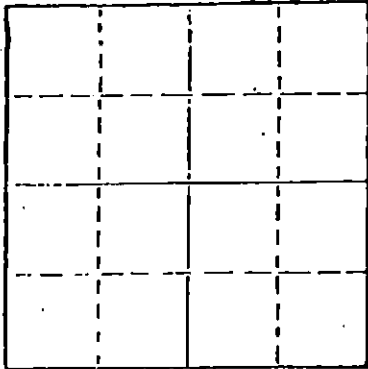


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Locate well correctly on above
Section Plat

Hodgeman County. Sec. 3 Twp. 22S Rge. 22W E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
C SE NE

Lease Owner Woolsey Petroleum Corporation
Lease Name Salmans Well No. 1
Office Address Suite 400, 300 W. Douglas, Wichita, KS 67202
Character of Well (Completed as Oil, Gas or Dry Hole)
DRY HOLE

Date Well completed January 28, 1981
Application for plugging filed January 28, 1981
Application for plugging approved January 28, 1981
Plugging commenced January 28, 1981
Plugging completed January 28, 1981
Reason for abandonment of well or producing formation

DRY HOLE

If a producing well is abandoned, date of last production
19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well Clarence Thomas
Producing formation Depth to top Bottom Total Depth of Well 4,615'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	586'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from feet to
feet for each plug set.

Mud to 900', 60 sx cement

Mud to 600', 30 sx cement

Mud to 40', plug 1/4 sk hulls,

10 sx cement

5 sx in rathole

2-6-81

COMMISSION

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor

FEB - 6 1981

CONSERVATION DIVISION
Wichita, Kansas

STATE OF Kansas COUNTY OF Sedgwick, ss.
Donald E. Hunt (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.

(Signature)

Suite 250, 200 West Douglas, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this

30th

day of

January


, 1981

Kathleen L. Greger
Kathleen L. Greger

Notary Public.

My commission expires

January 20, 1985



DRILLERS LOG

#1 SALMANS
C SE NE Section 3-22S-22W
Hodgeman County, Kansas

OPERATOR: WOOLSEY PETROLEUM CORPORATION
Suite 400, 300 West Douglas
Wichita, Kansas 67202

CONTRACTOR: DUNNE-GARDNER PETROLEUM, INC.
Suite 250, 200 West Douglas
Wichita, Kansas 67202

COMMENCED: January 18, 1981

COMPLETED: January 28, 1981

CASING RECORD: 8-5/8" @ 586' w/300 sx

FROM	TO	DESCRIPTION
0	505	Sand and shale
505	590	Surface
590	818	Shale
818	1035	Sand
1035	1363	Shale
1363	1399	Anhydrite
1399	1740	Shale
1740	3935	Lime and shale
3935	4384	Lime
4384	4388	Lime and shale
4388	4615	Lime
4615		Rotary total depth

STATE OF KANSAS)
) ss
COUNTY OF SEDGWICK)

I hereby certify that the above is a true and correct log to the best of my knowledge and belief.

Donald E. Hunt
Donald E. Hunt

Subscribed and sworn to before me this 30th day of January, 1981.

My appointment expires:
January 20, 1985

Kathleen L. Greiner
Kathleen L. Greiner
Notary Public

