

STATE CORPORATION COMMISSION
CONSERVATION DIVISION - Plugging Section
130 S. Market, Room 2078
Wichita, Kansas 67202

10-8

API NUMBER: 15-095-20,846-0000

NE NE, SECTION 24 TOWNSHIP 30 RANGE 9W

OPERATOR LICENSE # 5042 4950' FEET FROM S SECTION LINE
OPERATOR EDMISTON OIL CO INC 660' FEET FROM E SECTION LINE
NAME & BOX 232
ADDRESS GREAT BEND, KS 67530
LEASE NAME: NICOLAS "A" #2
COUNTY: KINGMAN
WELL TOTAL DEPTH: 4300' 139.75
PIPE: 4 1/2" @ 4299
SURFACE CASING: 8 5/8" @ 325'

ABANDONED OIL WELL GAS WELL INPUT WELL SWD D&A

OTHER WELL AS HEREINAFTER INDICATED: _____

PLUGGING CONTRACTOR: MIKE'S TESTING & SALVAGE
ADDRESS: CHASE, KS 67524 LICENSE: 31529

COMPANY TO PLUG AT: HOUR: 4:30PM DAY: 8 MONTH: 10 YR: 1996

PLUGGING PROPOSAL RECEIVED FROM: MANNY
COMPANY NAME: MIKE'S TESTING & SALVAGE PHONE: _____
WERE: PUMP 35 SACKS ON BOTTOM
35 SACKS AT 1325'
35 SACKS AT 925'
375 TO 0'

RECEIVED
KANSAS CORPORATION COMMISSION
OCT 16 1996
10-16-96
CONSERVATION DIVISION
WICHITA, KS

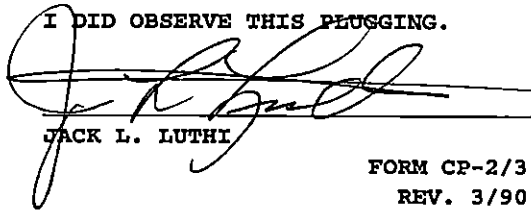
PLUGGING PROPOSAL RECEIVED BY: M.W.

PLUGGING OPERATIONS ATTENDED BY AGENT? ALL () PART {} NONE {

COMPLETED: HOUR: 4:30PM DAY: 8 MONTH: 10 YEAR: 1996

ACTUAL PLUGGING REPORT: PUMPED 35 SACKS WITH 100 LBS OF HULLS. THIS WAS COMMON CEMENT. PUSHED IT DOWN WITH WIPER PLUG AND WIRELING TO 3775'. SHOT 4 1/2" CASING OFF AT 3023'. PULLED TO 1375'. PUMPED 35 SACKS. PULLED TO 925'. PUMPED 35 SACKS. PULLED TO 375'. CIRCULATED CEMENT TO SURFACE.

REMARKS: 60/40 POZ 4% GEL ALLIED #4167

I DID OBSERVE THIS PLUGGING.

JACK L. LUTHI

INVOICED
OCT 17 1996
DATE
INV. NO. 46700