
Form CP-3 Rev. 6-26-62

J. P. Roberts Assitant Director 500 Insurance Building 212 North Market Wichita 2, Kansas

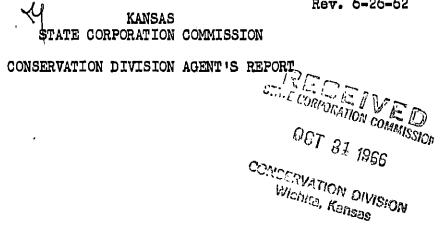

Operator's Full Name Sierra Petroleum Company, Inc.
Complete Address: 211 North Broadway, Wichita, Kansas
Lease Name Swingle "A" Well No. # 1
Location
County Kingman Total Depth 3100'
Abandoned Oil Well Gas Well Input Well SWD Well D & A X
Other well as hereafter indicated: This hole was a wash down.
Plugging Contractor: S & S Drilling Company
Address: Box 645, Great Bend, Kansas License No.
Operation Completed: Hourl1:00AM Day 26th Month Oct. Year 1966
The Above well was plugged as follows:
250' of 8 5/8" surface pipe, cement circulated. Hole was filled with
drilling mud to 240', 1st cementing plug, bridged with 2 sacks of dry
cement and 1 sack of hulls on fluid at 240, and cemented with 23 sacks
Hole was filled with drilling mud to 40°, 2nd cementing plug, bridged
with 1 sack of dry cement and 1 sack of hulls on fluid at 40°, and cem-
ented with 9 sacks to the base of the cellar. Rat hole bridged and cem-
ented with 2 sacks.
I hereby certify that the above well was plugged as herein stated.
INVOICED Signed: Quilie Cloury
Well Plugging Supervisor /
INV. NO. 4198-W
(/V V .)VO.