
J. P. Roberts Assitant Director 500 Insurance Building 212 North Market Wichita 2, Kansas

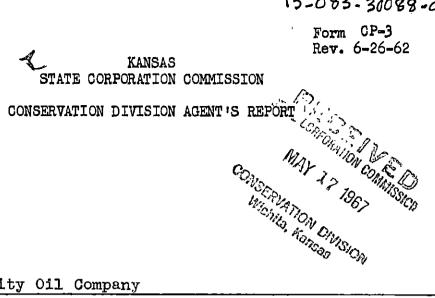

Operator's Full Name Quali	ty Oil Company		
Complete Address: 6320 Jac	cqueling,	Wichita, Kansas	
Lease Name Mooney	"B"	Well No.	1
Location C NE SE		Sec. 19 Twp. 22	Rge • 21 (E) (W)
County Hodgeman		Total Depth 1	4421
Abandoned Oil Well X Gas Well Input Well SWD Well D & A			
Other well as hereafter indicated: None			
Plugging Contractor: Knight Casing Pulling Co.			
Address: Box 405, Chas	se, Kansas	Lic	cense No. 436
Operation Completed: Hour 6:00PM Day 15 Month 5 Year 1967			
The Above well was plugged as follows:			
8 5/8" to 249' cirulated w/ cement. 5 1/2" to 4437' cemented/			
Top perforations 4360 Plug bottom w/ 20 sacks cement			
Top of cement 4262		Mud 4262 to 7	00 1
Spotted 35 sacks cement	700 to 600 t	Mud 6001	to 2491
Spotted 30 sacks cement	'2191 to 1191	Mud 1/19!	to 151 '
Plug, Hulls & 15 sarks o	sement 151 to 0	Company	Pump
Pulled 2433' of 5 1/22 (Casing.	····	`h
			
I hereby certify that the about 1 N V () 1	ove well was plugg		
1 10 4 0 1	117/69	Signed: Well	Plugging Supervisor
DATE	220-11)		
INV, NO.	7-1-1-1		