


15-095-30043-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

Kingman County, Sec. 12 Twp. 30 Rgs. 9 (E) (W) X

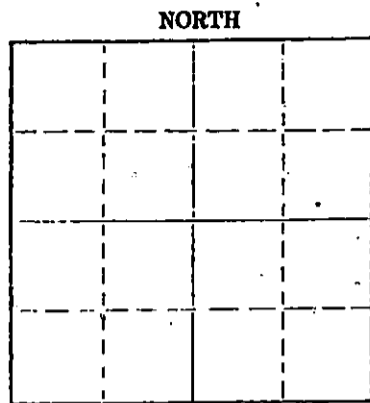

Locate well correctly on above Section Plat

Location as "NE/CNW/SW" or footage from lines NE/NE/SW
 Lease Owner Edmiston Oil Company
 Lease Name KANNGIESSER Well No. 1
 Office Address 801 First Nat'l. Bldg., Wichita, Kansas 67202
 Character of Well (completed as Oil, Gas or Dry Hole) _____
 Date well completed _____ 19____
 Application for plugging filed _____ March 29, 19 75
 Application for plugging approved _____ 19____
 Plugging commenced _____ April 2, 19 75
 Plugging completed _____ April 5, 19 75
 Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production _____ 19____
 Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein
 Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4285 Feet
 Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	244	-0-
				5 1/2	4285	2377.21

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Pushed a plug to 4000'. Dumped 25' of sand and 5 sacks cement. Shot casing at 3500, 3400, 3100, 3000, 2900, 2800, 2600, 2500 and 2415'. Pulled a total of 74 joints of 5 1/2" casing. Pushed a plug to 350' and built a rock bridge. Plugged well with 6 yards readymix concrete.


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Rockhold Engineering, Inc.
 Address P. O. Box 698, Great Bend, Kansas 67530

STATE OF Kansas COUNTY OF Barton, ss.

James W. Rockhold (employee of owner) or (owner) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.



(Signature) James W. Rockhold
 Box 698, Gt. Bend, Ks. 67530 James W. Rockhold
 (Address)

9th day of April, 19 75

Cathy Miller
 Cathy Miller Notary Public.

My commission expires September 30, 1975.

RECEIVED
 STATE CORPORATION COMMISSION

APR 10 1975

CONSERVATION DIVISION
 Wichita, Kansas

DRILLER'S LOG

Company: E. K. Edmiston
 501 First National Bank Building
 Wichita, Kansas 67202

Rotary Drilling Commenced: April 14, 1965

Rotary Drilling Completed: April 24, 1965

Well Name: KANNGIESSER No. 1
 NE/4 NE/4 SW/4 12-30S-9W
 Kingman County, Kansas

Contractor: E. K. Edmiston Drilling Co., Inc.
 501 First National Bank Building
 Wichita, Kansas 67202

Casing Record: 8-5/8" at 244' with 200 sacks cement and
 5-1/2" at 4285' with 200 sacks cement.

L O G

Measurements from top of Kelly Bushing

Sand and Shale	0 - 244
Red Bed Clay and Shale	731
Shale	1305
Shale and Lime	1620
Lime and Shale	1790
Lime	2220
Shale and Lime	3238
Lime and Shale	3564
Lime	4250
Chert and Lime	4267
Chert	4285 RTD

RECEIVED
 STATE CORPORATION COMMISSION
 APR 1 1975
 CONSERVATION DIVISION
 Wichita, Kansas

The undersigned, E. K. EDMISTON, President of E. K. Edmiston Drilling Co., Inc., hereby certifies on behalf of said company, that the above log is a true and correct log of the formations encountered in drilling the above well, as reflected by the daily drilling reports.

E. K. EDMISTON DRILLING CO., INC.

By E. K. Edmiston
 E. K. Edmiston, President

STATE OF KANSAS,
 SS:
 SEDGWICK COUNTY,

BE IT REMEMBERED, that on this 26th day of April, 1965, before me, the undersigned, a Notary Public within and for the County and State aforesaid, came E. K. Edmiston, known to me to be the same person who executed the foregoing instrument as President and on behalf of the E. K. Edmiston Drilling Co., Inc., and he duly acknowledged the execution of the same for himself and for said company.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal on the day and year last above written.

A. B. Bargaen
 A. B. Bargaen, Notary Public

