


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Reliever Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Kingman County, Sec. 20 Twp. 30 Rge. (E) 9 (W)

Location as "NE/CNW/SW" or footage from lines _____
Lease Owner E. H. Wood, Jr.
Lease Name Lattimore # 1 Well No. 1
Office Address 102 Insurance Building, Wichita, Ks.
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 7-15-70 19____
Application for plugging filed - 19____
Application for plugging approved " 19____
Plugging commenced " 19____
Plugging completed " 19____
Reason for abandonment of well or producing formation Dry Hole

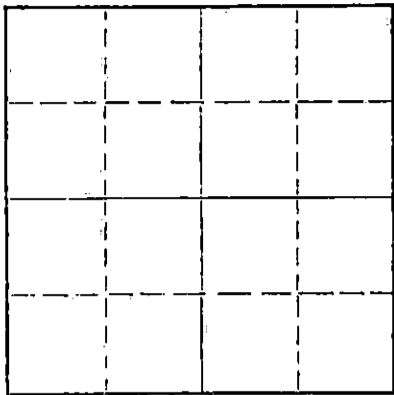

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? _____

Name of Conservation Agent who supervised plugging of this well G. B. Biberstein
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4370 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	242.42	0

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Mudded to 225' - 1/2 sack hulls & 25 sacks cement
Mudded to 40' - 1/2 sacks hulls & 10 sacks cement
2 sacks cement in rathole

RECEIVED
STATE CORPORATION COMMISSION
JUL 23 1970
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor Graves Drilling Co., Inc.
Address 505 Union Center, Wichita, Kansas 67202

STATE OF Kansas, COUNTY OF Sedgwick, ss.

John C. Graves (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above described well as filed and that the same are true and correct. So help me God.

(Signature) John C. Graves
505 Union Center, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 22 day of July, 1970



Mary Ann Scott
Notary Public.

My commission expires July 28, 1970

ROTARY DRILLERS' LOG

OPERATOR: E. H. Wood DRILLING COMMENCED: 7-8-70
 102 Insurance Bldg.
 Wichita, Kansas

CONTRACTOR: Graves Drilling Co., Inc. DRILLING COMPLETED: 7-15-70
 505 Union Center
 Wichita, Kansas

CASING RECORD: 8 5/8" surface casing LOCATION: Lattimore # 1
 set @ 250' with 230 sacks NE NE SE
 of cement. Section 20-30S-9W
 ----- Kingman County, Ks.

0	-	78	Sand
78	-	435	Red bed
435	-	1430	Shale
1430	-	1705	Shale & Lime
1705	-	1815	Lime
1815	-	2318	Shale & Shells
2318	-	2415	Lime
2415	-	3012	Shale & Shells
3012	-	3463	Lime
3463	-	3637	Sand & Shale
3637	-	4113	Lime
4113	-	4295	Shale
4295	-	4370	Chert & Lime
4370			Total Depth

I hereby certify that the foregoing statements are true and correct, to the best of my knowledge.

Graves Drilling Co., Inc.

RECEIVED
 STATE CORPORATION COMMISSION
 JUL 23 1970
 CONSERVATION DIVISION
 Wichita, Kansas

John C. Graves

STATE OF KANSAS)
 SEDGWICK COUNTY)

Subscribed and sworn to before me, a Notary Public, on this 22nd day of July, 1970.

My Commission Expires: July 28, 1970



Mary Ann Scott, Notary Public