


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission

WELL PLUGGING RECORD

P. O. Box 17027
Wichita, Kansas 67217
NORTH

Kingman County, Sec. 21 Twp. 30S Rge. 8E 9(W)

Location as "NE/CNWSW" or footage from lines NW NE SW
Lease Owner Edmiston Oil Company
Lease Name Lauterbach "B" Well No. 1
Office Address 405 First Natl Bank Bldg., Wichita, Ks. 67202
Character of Well (completed as Oil, Gas or Dry Hole) X
Date well completed May 22, 19 74
Application for plugging filed Sept. 4, 19 74
Application for plugging approved Sept. 5, 19 74
Plugging commenced Sept. 5, 19 74
Plugging completed Sept. 13, 19 74
Reason for abandonment of well or producing formation dry hole (could not make commercial well)

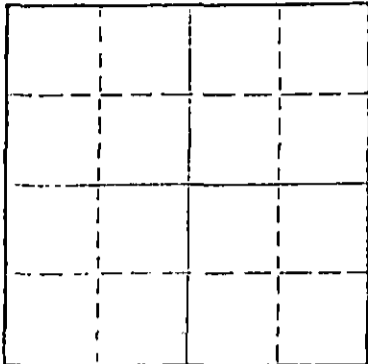

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Russell Biberstein
Producing formation Depth to top Bottom Total Depth of Well 4350
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	TO	SIZE	PUT IN	PULLED OUT
Surface pipe		8-5/8"		none
Prod. pipe		5 1/2"	4349	3176

RECEIVED FROM STATE CORPORATION COMMISSION NOV 1 1974 CONSERVATION DIVISION Wichita, Kansas

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Dump sand up to 4250'.
Dump 5 sacks cement with dump bailer,
Cement from 4250 to 4230'.

Wood bridge at 200'.
Rock from 200 to 190'.

3 yards of ready mix to surface.

Name of Plugging Contractor Clarke Corporation #583
Address Box 187, Medicine Lodge, Kansas 67104

STATE OF KANSAS COUNTY OF BARBER ss.


Elma R. Morgenstern (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Elma R. Morgenstern
Medicine Lodge, Kansas (Address)

Subscribed and sworn to before me this 10th day of October, 19 74

April 4, 1978

Jessie Hamilton
Notary Public



RECEIVED
STATE CORPORATION COMMISSION
SEP 6 1974
CONSERVATION DIVISION
Wichita, Kansas

DRILLER'S LOG

COMPANY: Edmiston Oil Company
405 First National Bank Bldg.
Wichita, Kansas 67202

ROTARY DRILLING COMMENCED: November 23, 1973

ROTARY DRILLING COMPLETED: December 4, 1973

WELL NAME: LAUTERBACH "B" #1

LOCATION: NW NE SW Sec. 21-30S-9W
Kingman County, Kansas

CONTRACTOR: E. K. Edmiston Drilling Co., Inc.
405 First National Bank Bldg.
Wichita, Kansas 67202


CASING RECORD: Set 240' 8-5/8" surface pipe w/175 sx.
Ran 5 1/2" prod. pipe @ 4349' w/100 sx.
50-50 Pozmix

L O G

Measurements from top of Kelly Bushing (Elevation 1661 K.B.)

Surface Clay	0 - 35
Sand and Shale	99
Shale	2013
Shale and Lime	4060
Lime	4140
Lime and Shale	4235
Lime	4318
Lime and Shale	4328
Lime	4350 R.T.D.

The undersigned, E. K. Edmiston, President of E. K. Edmiston Drilling Co., Inc., hereby certifies on behalf of said company, that the above log is a true and correct log of the formations encountered in drilling the above well, as reflected by the daily drilling reports.



E. K. Edmiston

STATE OF KANSAS)
COUNTY OF SEDGWICK) SS:

BE IT REMEMBERED that on this 10th day of December, 1973, before me, the undersigned, a Notary Public within and for the County and State aforesaid, came E. K. Edmiston, known to me to be the same person who executed the foregoing instrument on behalf of E. K. Edmiston Drilling Co., Inc., and he duly acknowledged the execution of the same for himself and for said company.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal on the day and year last above written.

Commission Expires:
November 9, 1977


Marilyn E. Fox, Notary Public

