

STATE OF KANSAS
STATE CORPORATION COMMISSION


Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Hodgeman County, Sec. 20 Twp 22S Rge. (E) 21 (W)

Location as "NE/CNW&SW&" or footage from lines C/SE NE
Lease Owner Strata Drilling, Inc.
Lease Name Pattullo Well No. 1
Office Address P. O. Box 355, Great Bend, Kansas 67530
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed December 5 19 70
Application for plugging filed December 5 19 70
Application for plugging approved December 5 19 70
Plugging commenced December 6 19 70
Plugging completed December 6 19 70
Reason for abandonment of well or producing formation Dry Hole

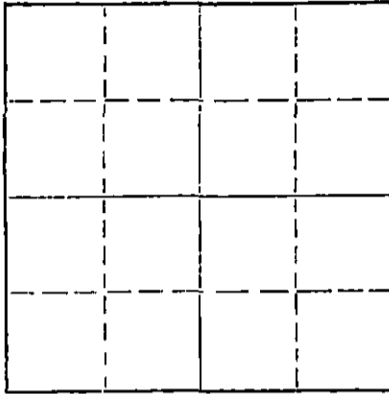

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Edgar J. Eves, Sublette, Kansas
Producing formation Depth to top Bottom Total Depth of Well 4392 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	8-5/8"	0	288.59'			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.
Plugged hole as follows: Plugged at 850' with 80 sacks of common cement; plugged at 280' with 30 sacks of common cement; plugged at 45' with 15 sacks of common cement.
Plug down at 5:30 A. M. December 6, 1970.


RECEIVED
STATE CORPORATION COMMISSION
DEC 8 - 1970
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Strata Drilling, Inc.
Address P. O. Box 355, Great Bend, Kansas 67530

STATE OF KANSAS, COUNTY OF BARTON, ss.
Charles W. Steincamp (employee of owner) or (owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Charles W. Steincamp
Charles W. Steincamp, President
P. O. Box 355, Great Bend, Kansas (Address)



Subscribed and sworn to before me this 7th day of December, 19 70
Elaine H. Taylor
Elaine H. Taylor Notary Public

My commission expires December 14, 1973

DRILLERS LOG

#1 Pattullo

CASING RECORD: 288.59' of new 8-5/8" surface casing.	COMPANY: Strata Drilling, Inc.	DESCRIPTION: C/SE NE Section 20-22S-21W Hodgeman County, Kansas
TOTAL DEPTH: 4392'	CONTRACTOR: Strata Drilling, Inc.	ELEVATION: 2173' K. B.
	COMMENCED: November 27, 1970	
	COMPLETED: December 6, 1970	

D. & A.

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Clay, Post Rock, Sand & Shale	0	311	Ran 288.59' of new 8-5/8" surface casing; set and cemented at 288.59' with 160 sacks of regular cement, 2% gel and 3% C. C. Plug down at 9:15 P. M. November 27, 1970.
Clay, Sand & Shale	311	531	
Shale & Clay	531	641	
#1 Anhydrite	641	649	
Shale	649	740	
Dakota Sand	740	870	
Shale	870	1300	
#2 Anhydrite	1300	1328	
Shale	1328	1369	
Red Bed, Shale & Shells	1369	1869	
Shale & Lime	1869	3996	
Lime	3996	4190	
Lime & Shale	4190	4256	
Lime	4256	4330	
Lime & Shale	4330	4390	
Cherty Lime	4390	4392	

Rotary Total Depth 4392'

D. & A.

RECEIVED
STATE CORPORATION COMMISSION
DEC 8 - 1970
CONSERVATION DIVISION
Wichita, Kansas

Plugged hole as follows: Plugged at 850' with 80 sacks of common cement; plugged at 280' with 30 sacks of common cement; plugged at 45' with 15 sacks of common cement. Plug down at 5:30 A. M. December 6, 1970.


STATE OF KANSAS)
) ss.
COUNTY OF BARTON)

I certify that this is a true and correct copy of the above log to the best of my knowledge.

STRATA DRILLING, INC.

Charles W. Steincamp
Charles W. Steincamp, President

Subscribed and sworn to before me this 7th day of December, 1970.



Elaine H. Taylor
Elaine H. Taylor, Notary Public