


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

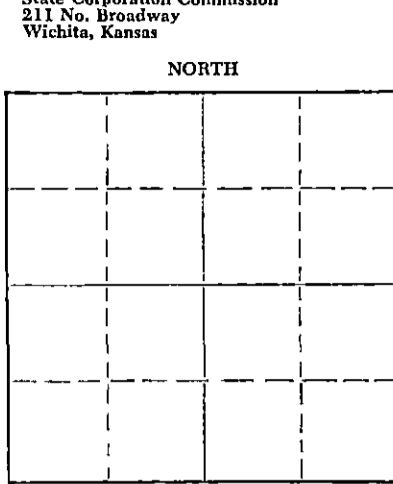

Locate well correctly on above Section Plat

Pawnee County, Sec. 13 Twp. 22 Rge. 17 (E) (W)
Location as "NE/CNW/SW" or footage from lines NE NE NE
Lease Owner Chief Drilling Co., Inc.
Lease Name Haege Well No. # 1
Office Address Box 97 Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed yes 19____
Application for plugging approved yes 19____
Plugging commenced 9-20-60 19____
Plugging completed 9-25-60 19____
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Frank Broadfoot.
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4155' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				<u>4 1/2"</u>		<u>3,887'</u>

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugging commenced 9-20-60. Plugging completed 9-25-60.
Measured into total depth, 4155'. Plugged off bottom: Sanded back to 4090' and dumped 5 sacks of cement. Worked and shot casing. Shot 4 1/2" casing at 3887'. Worked casing free. Built rack and slide. Pulled and laid down casing. Plugged well: Mudded hole up to ~~400~~ 300'. Set 10' rock bridge at 300' and dumped 20 sacks of cement. Mudded hole up to 40' and set 10' rock bridge at 40'. Capped the well with 10 sacks of cement.

RECEIVED
STATE CORPORATION COMMISSION

OCT 4 1960

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor J. O. Forbes d/b/a Forbes Casing Pulling Company 10-4-60
Address Box 221 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
J. O. Forbes (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. O. Forbes
Box 221 Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 26th day of September, 19 60

My commission expires December 8th, 1963
Kayann Jenkins Notary Public.



WELL NO. 1 LEASE Wm. J. Moore COMPANY Gulf Oil Corp. & Vickers Petrol. Co. A.F.E. 3386(29-114)
 DATE-DRILLING BEGAN 8-5-54 FINISHING WELL COMPLETED 8-25-54 FIRST PRODUCTION Dry
 SAND RECORD Dry Hole - Plugged & Abandoned TOTAL DEPTH 4155'

INITIAL PRODUCTION

CASING RECORD

SIZE	WEIGHT	THD.	CLASS	MAKE	SET AT DEPTH	SACKS CEMENT	LB. CAL. CHLO.	PULLED	LEFT IN
8-5/8					1064	500			1064
HOES: 4jcs-32#-10V-G-1 - 1M 25jcs-22.75-WF-A-5W									

S- 13T- 225R- 177

Distance H: 7' from HOS to top of 8-5/8" cas.

ELEVATION- DT 2020'

FORMATION RECORD

	FROM	TO
sd	0	200
Shells		340
Shells, ch		470
sd		600
sd, ch		650
sd sd		785
Arky		1100
sd sd, sb, shells		1450
Sh, shells		1820
Sh		1850
lm		2450
lm, ch		2920
lm		2930
lm, sh		3015
lm		3942
Gonglo, chert		4030
sh, sd		4045
Simpson		4095
sh, sd		4145
Artuckie		4155

PLUGGING
 WMA SEC 12 22 12/14
 WORK PAGE 100 1/12

