


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Hodgeman County. Sec. 6 Twp. 22SRge. 24W E/W-
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
440' FNL & 440' FEL of SE/4
Lease Owner Belama Oil Company
Lease Name Dixon Well No. 1
Office Address One William Cntr.-Suite 1830, Tulsa, OK
Character of Well (Completed as Oil, Gas or Dry Hole) 74103
Dry Hole

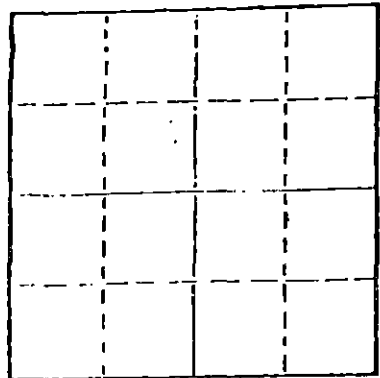

Date Well completed June 2, 1979
Application for plugging filed Verbal Application 19__
Application for plugging approved Verbal Approval 19__
Plugging commenced June 2, 1979
Plugging completed June 2, 1979
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production 19__

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Marvin Schmidt
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4,595'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	407'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy rotary mud from 4,595 ft. (rotary total depth) to 550 ft. Set plug at 550 ft. and cemented with 70 sacks cement. Filled hole with heavy rotary mud from 550 ft. to 390 ft. Set plug at 390 ft. and cemented with 20 sacks cement. Filled hole with heavy rotary mud from 390 ft. to 40 ft. Set solid plug at 40 ft. and cemented to cellar with 10 sacks cement, 3 sacks cement in rat hole.

Plugging operations accomplished utilizing Halliburton Oil Well cementing pump truck through 4 1/2 inch drill pipe.

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor Halliburton Services
410 Union Center Bldg., Wichita, Kansas 67202

STATE OF Kansas COUNTY OF Sedgwick, ss.
Dean Britting, Agent ~~Notary Public~~ of owner ~~XXXXXXXXXXXXXXXXXXXX~~

of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Dean Britting
200 N. Main, Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 7th day of June, 1979



E. Willison RECEIVED COMMISSION
Elsie Willison - Notary Public.
JUN 11 1979

My commission expires July 25, 1982

CONSERVATION DIVISION
Wichita, Kansas
6-11-79

KANSAS DRILLERS LOG

COMPANY Belama Oil Company

SEC. 6 T. 22S. R. 24W
LOC. 440' FNL & 440' FEL
of SE/4

FARM Dixon NO. 1

COUNTY Hodgeman

ROTARY TOTAL DEPTH 4,595'
COMM. May 22, 1979 COMP. June 2, 1979
CONTRACTOR H-30, Inc. (Rig #2)
ISSUED June 7, 1979

CASING

10 3/4"
8 5/8" Set at 407' cemented w/235 sxs cement
5 1/2"
4 1/2"

ELEVATION 2,428' K.B.

FIGURES INDICATE BOTTOM OF FORMATIONS

Sand and Shale	440'
Shale and Shells	1,120'
Sand	1,335'
Shale and Red Bed	1,470'
Shells	1,628'
Anhydrite	1,662'
Shale	2,165'
Lime and Shale	2,675'
Shale and Lime	2,810'
Lime and Shale	3,154'
Shale and Lime	3,310'
Lime and Shale	3,560'
Shale and Lime	3,725'
Lime and Shale	3,920'
Lime	4,260'
Lime and Shale	4,357'
Lime	4,595'
Rotary Total Depth	4,595'


I hereby certify the above and foregoing to be a true and correct log of the above described well as shown by the drilling reports.

H-30, Inc.

Dean Britting
Dean Britting

State of Kansas }
County of Sedgwick } SS:

Subscribed and Sworn to before me a Notary Public in and for said county and state this 7th day of June, 1979.



Elsie Willison
Elsie Willison - Notary Public

My Commission Expires: July 25, 1982

JUN 11 1979

CONSERVATION DIVISION
Wichita, Kansas