


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Hodgeman County, Sec. 4 Twp. 22 Rge. 24 W E/W  
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines <sup>150'</sup> C NW SW

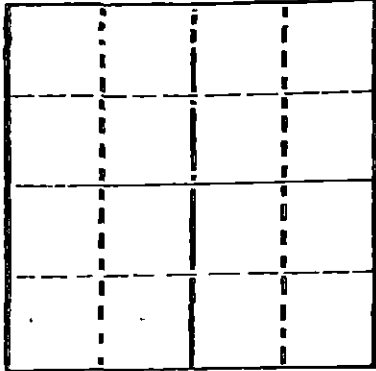

Locate well correctly on above Section Map

Lease Owner Patrick Petroleum Corporation  
Lease Name Gumbir Well No. 1  
Office Address Suite 414, 200 East 1st, Wichita 67202  
Character of Well (Completed as Oil, Gas or Dry Hole) Dry Hole

Date Well completed June 6, 1976 19  
Application for plugging filed June 6, 1976 19  
Application for plugging approved June 6, 1976 19  
Plugging commenced June 6, 1976 19  
Plugging completed June 6, 1976 19  
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Clarence Thomas, Jr.  
Producing formation Depth to top Bottom Total Depth of Well 4700'  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENTS	FROM	TO	SIZE	SET IN	WELLED OUT
	Surface	0	491'	8-5/8	yes	no

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Bottom Plug at 490' with 50 sacks  
Top and bridge plug at 40' and 15 sacks  
5 sacks in rathole  
Completed 12:45 a.m. 6/6/76

RECEIVED  
STATE CORPORATION COMMISSION

JUN 14 1976

CONSERVATION DIVISION  
Wichita, Kansas

6-14-76

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Slawson Drilling Company

STATE OF Kansas COUNTY OF Sedgwick

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James C. Remsberg  
James C. Remsberg  
408 One Twenty Building, Wichita, Kansas 67202  
(Address)

SUBSCRIBED AND SWORN TO before me this 10 day of June 1976

My commission expires January 17, 1977

Mary Lou Taylor  
Mary Lou Taylor  
Notary Public



DRILLERS LOG

COMPANY: Patrick Petroleum Company  
 Suite 414, 200 East First Street  
 Wichita, Kansas 67202

LEASE NAME: Gumbir No.1  
 150' E C NW SW 4-22-24W  
 Hodgeman County, Kansas

CONTRACTOR: Slawson Drilling Company, Inc.  
 408 One Twenty Building  
 Wichita, Kansas 67202

TOTAL DEPTH: 4700'

COMMENCED: May 29, 1976

COMPLETED: June 6, 1976

CASING: 513.36' of new 8-5/8" set at 491' with 350 sx cement

0' to 320' Surface hole  
 320' to 496' Shale  
 496' to 1205' Shale & Shells  
 1205' to 1360' Sand  
 1360' to 1470' Shale & shells  
 1470' to 1687' Shale  
 1687' to 1721' Anhydrite  
 1721' to 2560' Shale & Shells  
 2560' to 4395' Lime and Shale  
 4395' to 4640' Lime  
 4640' Cong.  
 4640' to 4700' Lime  
 4700' RTD

RECEIVED  
 STATE CONSERVATION COMMISSION  
 JUN 14 1976  
 CONSERVATION DIVISION  
 Wichita, Kansas

STATE OF KANSAS

COUNTY OF SEDGWICK

I, James C. Remsberg, of the Slawson Drilling Company, Inc.  
 upon oath state that the above and foregoing is a true and correct copy of the  
 log of the Gumbir No.1 well.

*James C. Remsberg*  
 James C. Remsberg

Subscribed and sworn to me on June 10, 1976.

*Mary Lou Taylor*  
 Mary Lou Taylor, Notary

My commission expires January 17, 1977

