


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
214 No. Broadway
Wichita, Kansas

NORTH

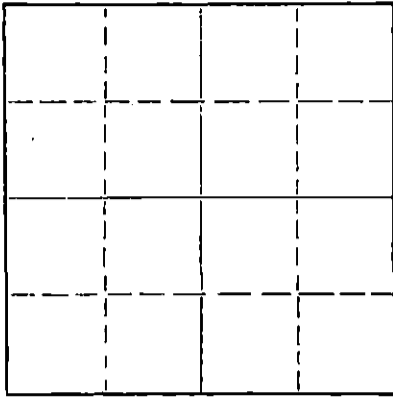

Locate well correctly on above
Section Plat

Rice County, Sec. 2 Twp. 22 Rge. 8 W (E) (W)
Location as "NE/CNW/SW" or footage from lines Gen NE/ NE/ NE
Lease Owner Rock Island Oil & Refg. Co. Inc.
Lease Name Vogel Well No. I
Office Address 321 West Douglas Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed _____ 19____
Application for plugging filed Feb 1962
Application for plugging approved March 1962
Plugging commenced March 12 1962
Plugging completed March 15 1962
Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Cecil Jones
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3515' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
						2,854'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged off bottom of hole with rock. Rock from 3478' to 3425'. Dumped 4 sx of cement. Mudded hole to 250'. Set 10' of rock bridge. Dumped 22 sx of cement. Mudded hole to to 31'. Set 10' of rock bridge. Dumped 7 sx of cement, filling to the bottom of the celler.

RECEIVED
STATE CORPORATION COMMISSION
MAR 19 1962
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Art Lamb Casing Pulling Co.
Address P.O. Box 983 Hutchinson, Kansas

STATE OF Kansas, COUNTY OF Reno, ss.
Art Lamb

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Art Lamb

P.O. box 983 Hutchinson, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this MARCH 18 day of March, 1962.

My commission expires January 5, 1966

Judy Lamb
Notary Public.

COPY


WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
503 East Murdock, Wichita, Kansas

Company- STERLING DRILLING CO. ET AL
Farm- Vogel No. 1

SEC. 2 T. 22 R. 8W
C NE NE

Total Depth. 3477'
Comm. 3-23-61 Comp. 3-31-61
Shot or Treated.
Contractor. Sterling Drlg.
Issued. 7-1-61

County Rice
KANSAS



CASING:
8 5/8" 258' cem w/250 sx.

Elevation. 1626' RB

Production. Dry

Figures indicate Bottom of Formations.

clay & sand	190
red bed	259
shale	600
shale & salt	1100
lime & shale	2295
shale	2500
lime	2780
lime & shale	2960
lime	3385
lime & shale	3431
Coring & Reaming	3477 RTD
Total Depth	
TOPS: SCOUT	
Heebner	2791
Brown Lime	2948
Lansing	2980
Conglomerate	3490
Mississippi	3495