


STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

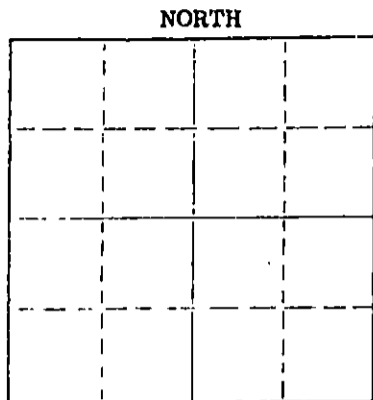

Locate well correctly on above Section Plot

Kingman County. Sec. 19 Twp. 30S Rge. 10W (TX (W)
Location as "NE/CNW&SW" or footage from lines NE SW
Lease Owner Zenith Drilling Corporation, Inc.
Lease Name Martin #1 Well No. 1
Office Address Suite 600 - 200 West Douglas, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed November 11, 1976 19
Application for plugging filed November 11, 1976 19
Application for plugging approved November 11, 1976 19
Plugging commenced 3:30 PM - November 11, 1976 19
Plugging completed 5:00 PM - November 11, 1976 19
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 1500' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	254'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy mud.
Heavy mud to 300' with 35 sacks thru drill pipe; heavy mud to 40' with Howco plug and 1/2 sack hulls, 10 sacks to surface, 2 sacks in rathole, 2 sacks in mousehole.

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor STERLING DRILLING COMPANY
Address P. O. Box 129, Sterling, Kansas 67579

STATE OF KANSAS COUNTY OF RICE
E. A. Wuellner (employee of owner) or (owner or operator) of the above-described


well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. STERLING DRILLING COMPANY

(Signature) *E. A. Wuellner*
F. A. Wuellner, Secretary
P. O. Box 129, Sterling, Kansas 67579
(Address)

Subscribed and sworn to before me this 15th day of November 19 76

CHARLES HALL - NOTARY PUBLIC
My Commission Expires Jan. 8, 1978

Charles M. Hall
Charles M. Hall, Notary Public.



STERLING DRILLING COMPANY
P. O. Box 129
Sterling, Kansas 67579

WELL LOG ----- MARTIN #1

Located: NE SW, Section 19-30S-10W, Kingman County, Kansas

OWNER: Zenith Drilling Corporation, Inc.
ROTARY DRILLING CONTRACTOR: Sterling Drilling Company

COMMENCED: November 2, 1976
COMPLETED: November 11, 1976

TOTAL DEPTH: 4500'

<u>LOG</u>	
0 - 150	Sand
150 - 256	Red Shale
256 - 1390	Shale
1390 - 3700	Lime and Shale
3700 - 3900	Lime
3900 - 4310	Lime and Shale
4310 - 4375	Lime
4375 - 4446	Lime and Shale
4446 - 4500	Lime

CASING RECORD

Ran 6 joints 8 5/8", 23# new seamless casing,
243' pipe set at 254' K.B. Cemented with
200 sacks regular with 3% cc, 2% gel. Plug
down at 7:15 PM, 11-2-76.

RECEIVED

NOV 17 1976

CONSTRUCTION DEPT.
STERLING, KANSAS

Plugged: