


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

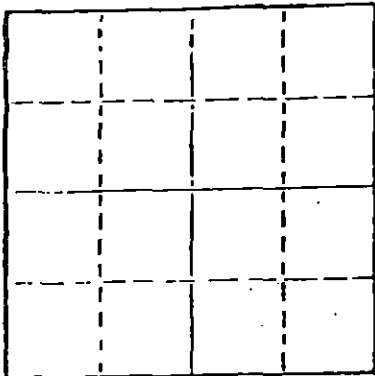

Locate well correctly on above
Section Plot

Pawnee County, Sec. 20 Twp. 22S Rge. 16 E/W
Location as "NE/CNW/SW" or footage from lines
SW SW SE

Lease Owner Alpine Drilling Company
Lease Name Ward Well No. 1
Office Address 800 Bitting Bldg., Wichita, Kansas 67202
Character of Well (Completed as Oil, Gas or Dry Hole)
Dry Hole

Date Well completed June 21 1977
Application for plugging filed June 21, 1977
Application for plugging approved June 21, 1977
Plugging commenced 3:00 p.m., June 21, 1977
Plugging completed 5:00 p.m., June 21, 1977
Reason for abandonment of well or producing formation
Dry Hole

If a producing well is abandoned, date of last production
19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation Depth to top Bottom Total Depth of Well 4150'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASIN; RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	687'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy mud to 420'.
Pumped 40 sacks 50-50 Pozmix with 2%
Gel through drill pipe, heavy mud to
40', set solid bridge with 10 sacks
50-50 Pozmix with 2% Gel to surface.
Two sacks in rathole. Plug down at
5:00 p.m. by Allied.

RECEIVED
STATE CORPORATION COMMISSION

JUN 26 1977

6-28-77

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Sterling Drilling Company, P. O. Box 129,
Sterling, Kansas 67579

STATE OF KANSAS COUNTY OF RICE ss.
Bernard Laudermilk

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. STERLING DRILLING COMPANY


(Signature)

Bernard Laudermilk
Bernard Laudermilk, President
P.O. Box 129, Sterling, Ks. 67579
(Address)

Subscribed and sworn to before me this 24th day of June, 1977

CHARLES HALL—NOTARY PUBLIC
My Commission Expires Jan. 6, 1978

CHARLES M. HALL, Notary Public.



STERLING DRILLING COMPANY
P. O. Box 129
Sterling, Kansas 67579

WELL LOG ----- WARD #1
Located SW SW SE, Section 20-22S-16W, Pawnee County, Kansas

OWNER: Alpine Drilling Company
ROTARY DRILLING CONTRACTOR: Sterling Drilling Company

COMMENCED: June 13, 1977
COMPLETED: June 21, 1977

TOTAL DEPTH: 4150'

LOGCASING RECORD

0 - 445 Gravel and Shale
445 - 1230 Shale and Red Bed
1230 - 2620 Lime and Shale
2620 - 4150 Lime

Ran 17 Jts. 8-5/8" OD Casing - 687'.
Cemented @ 699' KB w/ 450 sacks
cement w/ 2% Gel & 3% CC. Plug down
at 8:00 a.m. by Allied.

Plugged.

RECEIVED
WATER CONSERVATION COMMISSION

JUN 28 1977

CONSERVATION DIVISION
Wichita, Kansas