


STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

WELL PLUGGING RECORD

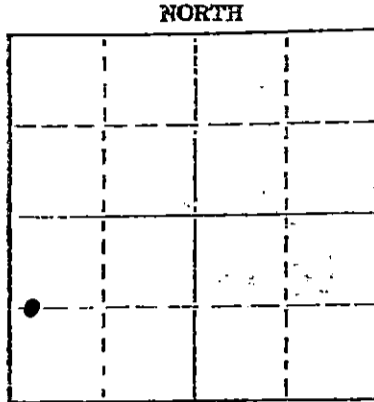

Locate well correctly on above Section Plat

Pawnee County, Sec. 32 Twp. 22S Rge. (E) 17 (W)
Location as "NE/CNW2SW2" or footage from lines 1320 NSI 330' FWI
Lease Owner Little George Oil Co.
Lease Name Jordaan Well No. 3
Office Address 225 Sutton Place
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed 8-20-56 19
Application for plugging filed 6-7-74 19
Application for plugging approved 6-12-74 19
Plugging commenced 9-19-74 19
Plugging completed 9-26-74 19
Reason for abandonment of well or producing formation Reservoir depleted
If a producing well is abandoned, date of last production 12-31-73 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Dale Balthazar
Producing formation Conglom. sd Depth to top 4176 Bottom 4258 Total Depth of Well 4304 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Conglom. Sand	Oil	4176	4258	5 1/2	4303	3243'
				8 5/8	246	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Dump sand to 4150 and cap with 4 sx cement. Fill casing with water. Shoot off 5 1/2" casing at 3243'. Pull 82 joints pipe. Install plug retainer on 8 5/8". Plug well with 2 sx hulls, 20' sx gel and 1 sack hulls. Release plug and cement with 100 sx 50-50 Poz mix cement with 6% gel. Plug down 8:45 p.m. 9-26-74.

RECEIVED
STATE CORPORATION COMMISSION

OCT 21 1974

Name of Plugging Contractor Kathol Petroleum, Inc.
Address 230 Sutton Place, Wichita, Ks. 67202

CONSERVATION DIVISION
Wichita, Kansas

STATE OF Kansas COUNTY OF Sedgwick

Don Malone (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Donald Malone
225 Sutton Place - Wichita, Ks. 67202
(Address)

Subscribed and Sworn to before me this 17 day of October, 19 74

March 1, 1978

Barbara B Britain
Notary Public.



LEASE: Jordaan #3
OWNER: Colorado Oil and Gas Corp.
CONTRACTOR: Earl F. Wakefield
COMM: 7-17-56 COMP: 7-29-56

LOCATION: W/2 W/2 SW/4 32-22-17W
Pawnee County, Kansas
CASING: 8 5/8" Set @ 246'
5 1/2" Set @ 4303'

Elevation

Surface	250
Blue Clay	385
Red Bed	600
Sand	690
Red Shale	895
Shale & Shells	1635
Lime & Shale	2015
Lime	2195
Lime & Shale	2545
Lime	2775
Lime & Shale	3475
Lime	3607
Lime & Shale	3775
Lime	3830
Lime & Shale	3920
Lime	4209
Lime & Sand	4255
Lime	4304
T. R. D.	4304

RECEIVED
STATE CORPORATION COMMISSION
JUN 12 1974
CONSERVATION DIVISION
Wichita, Kansas

TOPS

Heebner	3635
Brown Limestone	3736
Lansing	3744
Congl. Shale	4166
Congl. Cht.	4198
Misner Sand	4254

STATE OF KANSAS)
) SS
COUNTY OF SEDGWICK)

I hereby certify that the above is a true and correct copy of the log of the Jordaan #3 well located W/2. W/2 SW/4 32-22-17W, Pawnee County, Kansas

Earl F. Wakefield

Subscribed and sworn to before me this 9th day of August, 1956

[Signature]

My Commission Expires: 7-26-58

