

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
266 N. Main St., Ste. 220
Wichita, KS 67202-1513

API Well Number: 15-115-21243-00-00
Spot: NWNESE Sec/Twnshp/Rge: 10-18S-1E
2310 feet from S Section Line, 990 feet from E Section Line
Lease Name: SCULLY W Well #: 10-10
County: MARION Total Vertical Depth: 3310 feet

Operator License No.:	String	Size	Depth (ft)	Pulled (ft)	Comments
<u>5920</u>	PROD	5.5	3308	592	150 SX
Op Name: <u>BANDY, TERRY P. DBA TE-PE OIL & G</u>	SURF	8.625	220		150 SX
Address: <u>PO BOX 522</u> <u>CANTON, KS 67428</u>					

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 10/20/2016 12:00 AM
Plug Co. License No.: 30280 Plug Co. Name: SUNFLOWER WELL SERVICE, INC.
Proposal Revd. from: TERRY P BANDY Company: SUNFLOWER WELL SERVICE Phone: (620) 628-4428

Proposed Plugging Method: NOTE: PBDT 3154 WITH SAND AND 5 SACKS OF CEMENT. TO PLUG ACCORDING TO THE RULES AND REGULATIONS OF THE KCC.

Plugging Proposal Received By: JERRY SPARLING Witness Type: PARTIAL
Date/Time Plugging Completed: 10/26/2016 12:00 AM KCC Agent: JERRY SPARLING

Actual Plugging Report:

FILLED 5 1/2" CASING WITH SAND TO 3040' AND DUMP BAIL 5 SACKS OF CEMENT AT 3040'. RIP OFF AND PULL 592' OF 5 1/2" CASING. BRIDGE OPEN HOLE AT 260' AND FILL SURFACE CASING TO TOP WITH 5 YARDS OF SLURRY MIX CEMENT.

Perfs:

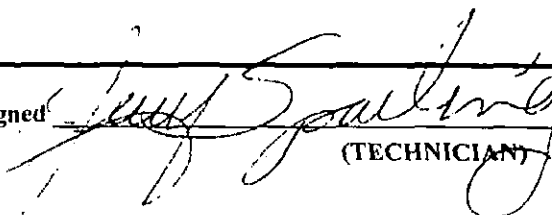
Top	Bot	Thru	Comments
3251	3255		
3225	3235		
3117	3120		

Remarks: BUILDERS CONCRETE TICKET #406657.

Plugged through: CSG

District: 02

Signed


(TECHNICIAN)

Form CP-2/3

DC
DEC 21 2016