

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
266 N. Main St., Ste. 220
Wichita, KS 67202-1513

API Well Number: 15-115-20873-00-00
Spot: NESWSE Sec/Twnshp/Rge: 10-18S-1E
990 feet from S Section Line, 1650 feet from E Section Line
Lease Name: W SCULLY Well #: 3-10
County: MARION Total Vertical Depth: 3350 feet

Operator License No.:	String	Size	Depth (ft)	Pulled (ft)	Comments
<u>5920</u>	CIBP		3215		
Op Name: <u>BANDY, TERRY P. DBA TE-PE OIL & G</u>	PROD	5.5	3349	600	300 SX
Address: <u>PO BOX 522</u> <u>CANTON, KS 67428</u>	SURF	8.625	212		150 SX

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 10/28/2016 12:00 AM
Plug Co. License No.: 30280 Plug Co. Name: SUNFLOWER WELL SERVICE, INC.
Proposal Revd. from: TERRY P BANDY Company: SUNFLOWER WELL SERVICE Phone: (620) 628-4428

Proposed Plugging Method: NOTE: PERFS 3270-74, A CEMENT RETAINER AT 3267. PERFS 3257-62, A CEMENT RETAINER AT 3250. CIBP AT 3215. TO PLUG ACCORDING TO THE RULES AND REGULATIONS OF THE KCC.

Plugging Proposal Received By: JEFF KLOCK Witness Type: PARTIAL
Date/Time Plugging Completed: 11/03/2016 12:00 AM KCC Agent: JERRY SPARLING

Actual Plugging Report:

FILL 5 1/2" CASING WITH SAND TO 3070' AND DUMP 5 SACKS OF CEMENT AT 3070' WITH BAILER. FILL HOLE WITH FRESH WATER. RIP AND PULL OUT 600' OF 5 1/2" CASING. BUILT BRIDGE AT 290' AND FILL HOLE TO TOP OF SURFACE CASING WITH 5 YARDS OF SLURRY MIX CEMENT.

Perfs:

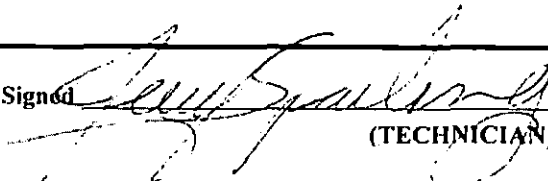
Top	Bot	Thru	Comments
3270	3274		
3257	3262		
3231	3236		
3121	3124		

Remarks: BUILDERS CONCRETE TICKET #520412.

Plugged through: CSG

District: 02

Signed


(TECHNICIAN)

Form CP-2/3


DEC 21 2016