

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

Kingman County, Sec. 23 Twp. 30S Rge. 10 (W)

Location as "NE/CNW/SW" or footage from lines C SE SE
Lease Owner E. K. Edmiston
Lease Name Shaufler Well No. 1
Office Address 425 First Natl Bank Bldg., Wichita, Ks.
Character of Well (completed as Oil, Gas or Dry Hole) dry hole
Date well completed Dec. 19, 19 67
Application for plugging filed Dec. 21, 19 67
Application for plugging approved 19
Plugging commenced Dec. 20, 19 67
Plugging completed Dec. 20, 19 67
Reason for abandonment of well or producing formation dry hole

NORTH

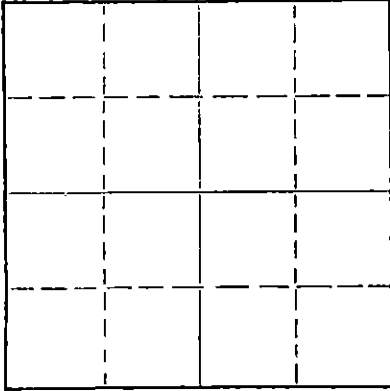

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well Archie Elving
Producing formation Depth to top Bottom Total Depth of Well 479d Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface pipe		-0-	235'	8-5/8"	12/4/67	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Set bottom plug at 225' with 1/2 sack hulls + 25 sx. cement;
Set top plug at 40' with 1/2 sack hulls + 10 sacks cement;
2 sacks cement in rathole.

DEC 22 1967
CONSERVATION DIVISION
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor E. K. Edmiston Drilling Co., Inc.
Address 425 First National Bank Bldg., Wichita, Kansas 67202


STATE OF KANSAS, COUNTY OF SEDGWICK ss.
E. K. Edmiston

(Employer, agent or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements and matters herein contained and the log of the above described well as filed and that the same are true and correct. So help me God.

(Signature)

425 First Natl Bank Bldg., Wichita, Ks.
(Address)

Subscribed and sworn to before me this 21st day of December, 19 67



My commission expires November 9, 1969

Marilyn E. Fox
Notary Public.

DRILLER'S LOG

COMPANY: E. K. Edmiston
 425 First National Bank Building
 Wichita, Kansas 67202

ROTARY DRILLING COMMENCED: December 4, 1967

ROTARY DRILLING COMPLETED: December 18, 1967

WELL NAME: SHAUFLER No. 1

LOCATION: C SE SE Sec. 23-30S-10W
 Kingman County, Kansas

CONTRACTOR: E. K. Edmiston Drilling Co., Inc.
 425 First National Bank Building
 Wichita, Kansas 67202

CASING RECORD: Set 235' of 8-5/8" surface pipe
 w/175 sacks Posmix Sunset


L O G

Measurements from top of Kelly Bushing (Elev. 1722 K.B.)

Surface Clay and Sand	0 - 100
Red Bed	235
Red Bed and Clay	780
Red Bed and Shale	1295
Anhydrite	1355
Shale	1515
Shale and Lime	1605
Lime and Shells	1809
Lime and Shale	3748
Lime	4250
Lime and Shale	4370
Lime	4411
Cherty Lime	4436
Chert and Lime	4523
Lime and Shale	4665
Shale and Sand	4791 R.T.D.

RECEIVED
 STATE CORPORATION COMMISSION
 DEC-22 1967
 CONSERVATION DIVISION
 WICHITA, KANSAS

The undersigned, E. K. Edmiston, President of E. K. Edmiston Drilling Co., Inc., hereby certifies on behalf of said company, that the above log is a true and correct log of the formations encountered in drilling the above well, as reflected by the daily drilling reports.





 E. K. Edmiston

STATE OF KANSAS)
) SS:
 COUNTY OF SEDGWICK)

BE IT REMEMBERED that on this 21st day of December, 1967, before me, the undersigned, a Notary Public within and for the County and State aforesaid, came E. K. Edmiston, known to me to be the same person who executed the foregoing instrument on behalf of E. K. Edmiston Drilling Co., Inc., and he duly acknowledged the execution of the same for himself and for said company.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal on the day and year last above written.





 Marilyn E. Fox, Notary Public