

STATE OF KANSAS
STATE CORPORATION COMMISSION

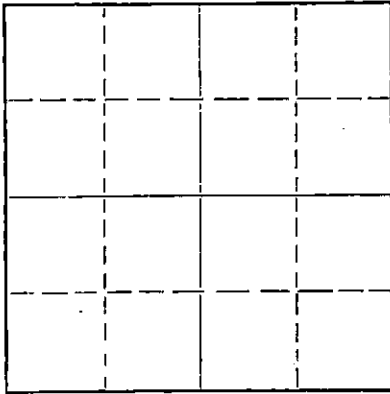
WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Kingman County, Sec. 26 Twp. 30S Rge. 10(W)

Location as "NE/CNW/SW" or footage from lines C SW NE
Lease Owner E. K. Edmiston
Lease Name Cox "C" Well No. 1
Office Address 425 First Natl Bank Bldg., Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) dry hole
Date well completed July 5, 1968
Application for plugging filed July 9, 1968
Application for plugging approved 19
Plugging commenced July 5, 1968
Plugging completed July 5, 1968
Reason for abandonment of well or producing formation dry hole

NORTH



Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Archie Elving
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4495 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface Pipe		0	260'	8-5/8"	6/25/68	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with mud to 240 feet; set bottom plug with 25 sacks cement; mud to 40 feet, set top plug with 10 sacks cement.

RECEIVED
STATE CORPORATION COMMISSION
JUL 10 1968
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor E. K. Edmiston Drilling Co., Inc.
Address 425 First National Bank Bldg., Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK ss.
E. K. Edmiston (employee of owner) of (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) _____
425 First Natl Bank Bldg., Wichita, Ks.
(Address)

Subscribed and Sworn to before me this 9th day of July, 1968

Marilyn E. Fox
Marilyn E. Fox Notary Public.



DRILLER'S LOG

COMPANY: E. K. Edmiston
 425 First National Bank Building
 Wichita, Kansas 67202

ROTARY DRILLING COMMENCED: June 24, 1968

ROTARY DRILLING COMPLETED: July 5, 1968

WELL NAME: COX "C" #1

LOCATION: C SW NE Section 26-30S-10W
 Kingman County, Kansas

CONTRACTOR: E. K. Edmiston Drilling Co., Inc.
 425 First National Bank Building
 Wichita, Kansas 67202

CASING RECORD: Set 260' of 8-5/8" surface pipe
 w/200 sacks Sunset

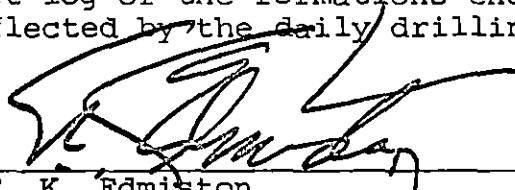
L O G

Measurements from top of Kelly Bushing (Elevation 1709 K.B.)

Sand and Clay	0 - 180
Red Bed	820
Shale and Shells	1260
Shale and Lime	2108
Lime	2256
Lime with some Shale	2414
Lime and Shale	3110
Lime	3188
Lime and Shale	3928
Lime	4400
Chert	4486
Lime	4495 R.T.D.

RECEIVED
 STATE CORPORATION COMMISSION
 JUL 10 1968
 CONSERVATION DIVISION
 Wichita, Kansas

The undersigned, E. K. Edmiston, President of E. K. Edmiston Drilling Co., Inc., hereby certifies on behalf of said company, that the above log is a true and correct log of the formations encountered in drilling the above well, as reflected by the daily drilling reports.


 E. K. Edmiston


STATE OF KANSAS)
) SS:
 COUNTY OF SEDGWICK)

BE IT REMEMBERED that on this 8th day of July, 1968, before me, the undersigned, a Notary Public within and for the County and State aforesaid, came E. K. Edmiston, known to me to be the same person who executed the foregoing instrument on behalf of E. K. Edmiston Drilling Co., Inc., and he duly acknowledged the execution of the same for himself and for said company.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal on the day and year last above written.



My Commission Expires:
 November 9, 1969


 Marilyn E. Fox, Notary Public