


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

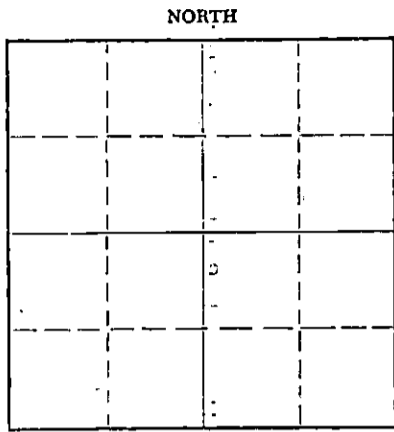

Locate well correctly on above Section Plat

Kingman County. Sec. 27 Twp. 30S Rge. ~~XXX~~ 10 (W)
Location as "NE/CNW/SW" or footage from lines C SW NE
Lease Owner Pickrell Drilling Company
Lease Name McGuire "A" Well No. 1
Office Address 705 Fourth Nat'l Bank Bldg., Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed March 11, 1969
Application for plugging filed March 11, 1969
Application for plugging approved March 11, 1969
Plugging commenced March 11, 1969
Plugging completed March 11, 1969
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Archie V. Elving
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4445 Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	219'	None


Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Heavy mud to 210'. Set plug. Cemented w/25 sacks cement and 1/2 sack hulls. Heavy mud to 40'. Set plug. Cemented with hulls and 10 sacks cement to bottom of cellar. Plugged rat hole with 2 sacks cement.



(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Pickrell Drilling Company
Address 705 Fourth National Bank Building, Wichita, Kansas 67202

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
C. W. Sebitts (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well filed, and that the same are true and correct. So help me God.



(Signature) C. W. Sebitts, Partner & Attorney-in-Fact
705 4th Nat'l Bank Bldg., Wichita, Ks. 67202
(Address)

SUBSCRIBED AND SWORN to before me this 19th day of March, 1969

L. M. Whiting
Notary Public.

My commission expires May 10, 1970

ROTARY DRILLING LOG

COMPANY: Pickrell Drilling Company
 705 Fourth National Bank Bldg.
 Wichita, Kansas 67202
 Rotary Drilling Commenced 3/1/69
 Rotary Drilling Completed 3/11/69

LOCATION: McGuire "A" No. 1
 C SW NE Sec. 27-30S-10W
 Kingman County, Kansas

CONTRACTOR: **PICKRELL DRILLING COMPANY**
 Wichita, Kansas

CASING RECORD: (12 jts.) Used 28# 8 5/8" surface casing set at 219' KB with 170 sacks cement. Circ. Completed 2:15 PM, March 1, 1969.
 No oil string was run. D. & A., plugged March 11, 1969.

LOG

(Figures indicate bottom of formation — measurements from top of rotary bushing.)

104	Sand	C. F. S.
260	Red Rock	3070'
1060	Red Bed & Shale	3200'
1500	Shale & Shells	3230'
1900	Shale & Lime	4425'
2560	Lime & Shale	4445'
2985	Shale & Lime	
3160	Shale w/Lime	
3480	Lime & Shale	
3755	Shale & Lime	Slope Tests
4425	Lime	2500'
4445	Mississippi, RTD	3000'
		3500'
		4000'
		S. L. M.
		4372'

RECEIVED
 STATE CORPORATION COMMISSION
 MAR 24 1969
 CONSERVATION DIVISION
 Wichita, Kansas

The undersigned, C. W. Sebitts, Attorney-in-Fact for PICKRELL DRILLING COMPANY, hereby certifies in behalf of said Company, that the above is a true and correct log of the formation encountered in drilling the above well as reflected by the Daily Drilling Reports.

PICKRELL DRILLING COMPANY
 By [Signature]
 C. W. Sebitts, Attorney-in-Fact

STATE OF KANSAS }
 COUNTY OF SEDGWICK } ss.:

On this 15 day of March, 1969, before me the undersigned, a Notary Public, in and for the County and State aforesaid, personally appeared C. W. Sebitts, to me known to be the identical person who subscribed the name of PICKRELL DRILLING COMPANY to the foregoing instrument as its Attorney-in-Fact and acknowledged to me that he executed the same as his free and voluntary act and deed, and as the free and lawful act and deed of such company, for the uses and purposes therein set forth.

Given under my hand and seal of office the day and year last above written.

My commission expires: May 10, 1970

[Signature]
 Notary Public

L. M. Whiting