

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
266 N. Main St., Ste. 220
Wichita, KS 67202-1513

API Well Number: 15-063-22299-00-00
Spot: NWNESESE Sec/Twnshp/Rge: 23-12S-31W
1088 feet from S Section Line, 335 feet from E Section Line
Lease Name: ZERR Well #: 2-23
County: GOVE Total Vertical Depth: 4580 feet

Operator License No.: 3062
Op Name: QUESTA ENERGY CORPORATION
Address: PO BOX 50968
AMARILLO, TX 79159

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	263		190 SX

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 11/19/2016 12:00 AM
Plug Co. License No.: 31548 Plug Co. Name: DISCOVERY DRILLING
Proposal Rcvd. from: TOM Company: DISCOVERY DRILLING Phone: (785) 623-2920

Proposed Plugging Method: Ordered 255 sx 60/40 pozmix - 4% gel cement with 1/4# flo- seal per sack.
Space all plugs with heavy drilling mud through drill pipe.

Plugging Proposal Received By: PAT STAAB WitnessType: NONE
Date/Time Plugging Completed: 11/19/2016 9:30 AM KCC Agent: PAT STAAB

Actual Plugging Report:

1st plug @2347 w/50 sx
2nd plug @1479 w/100 sx
3rd plug @313 w/50 sx
4th plug @40 w/10 sx

Rathole 30 sx Mousehole 15 sx

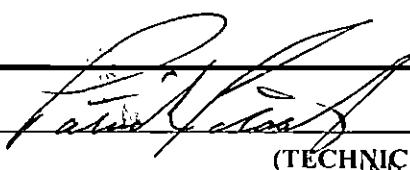
Perfs:

KCC WICHITA
JAN 09 2017
RECEIVED

Remarks: CONSOLIDATED

Plugged through: DP

District: 04

Signed 

(TECHNICIAN)
INVOICED

CM

JAN 19 2017

Form CP-2/3

DEC 16 2016