

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
266 N. Main St., Ste. 220  
Wichita, KS 67202-1513

API Well Number: 15-077-21806-00-00  
Spot: SWNENWNW Sec/Twnshp/Rge: 11-32S-7W  
360 feet from N Section Line, 965 feet from W Section Line  
Lease Name: PARSONS TRUST 3207 Well #: 11-1  
County: HARPER Total Vertical Depth: 5841 feet

Operator License No.: 34192  
Op Name: SANDRIDGE EXPLORATION AND PRO  
Address: 123 ROBERT S. KERR AVE  
OKLAHOMA CITY, OK 73102

String	Size	Depth (ft)	Pulled (ft)	Comments
COND	18	60		36 sx cement
	11 8.75	23		205 sx cement
PROD	7	4960		205 SX
SURF	9.625	741		385 SX

Well Type: SWD UIC Docket No: \_\_\_\_\_ Date/Time to Plug: \_\_\_\_\_  
Plug Co. License No.: 33338 Plug Co. Name: ORR ENTERPRISES, INC.  
Proposal Rcvd. from: SHAUN SANDERS Company: \_\_\_\_\_ Phone: (405) 839-2248

Proposed Method: Set CIBP @ 4900'. Release tbg & circulate hole with mud. Cap CIBP with 15 sks cement. POH with tbg. Weld on 7" pull sub. Cut & pull free pipe. Spot the following cement plugs:a) @ 1150' spot 50 sks Class C Cement.b) @ 800' spot 50 sks Cement.c) @ 300' to surface spot 100 sks Cement circulate to surface. RDMOSU, cut & cap well. Dig up rig anchors.

Plugging Proposal Received By: STEVE VANGIESON WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 12/16/2016 12:30 PM KCC Agent: STEVE VANGIESON

Actual Plugging Report:

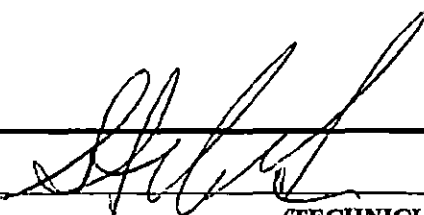
Perfs:

Set CIBP off of tbng at 4900'. Release BP from tubing. Circulated casing with mud and spotted 155 sx cement on BP. Recovered casing from 1328 and layed out. Ran 2 7/8 tubing to 1150' spotted 50 sx cement. Pulled tubing to 800' & spotted 50 sx cement. Pulled tubing to 300' & circulated cement to surface.

Remarks: ORR ENT CLASS C CEMENT

Plugged through: TBG

District: 02

Signed  \_\_\_\_\_  
(TECHNICIAN)

INVOICED  
JAN 19 2017